



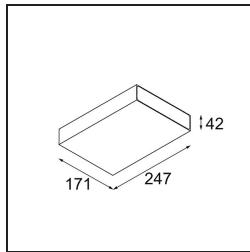

| |
|----------|
| Date |
| Customer |
| Project |
| Type |


Sulfer Uplight Wall 1x Spreadlight LED 2700K Wide Flood Casambi DI Black Structure

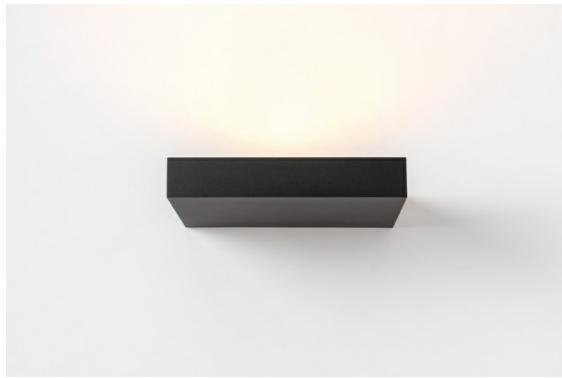

Just like the Sulfer family, Sulfer Uplight is ideal for ambient wall lighting. But this indirect light is different. As Sulfer Uplight is installed perpendicular to the wall, its LED provides a flood beam upward. Not only does it gently bounce off the wall, but also, off the ceiling, creating a secondary, softer and wider light beam. Try it for a special atmosphere.

Specifications

| | |
|---------------------------------|----------------------|
| Material | 13272632 |
| Light Source Type | LED |
| LED Type | LUMILED 1211 GEN4 |
| LED technology | LED COB |
| CRI | Min. 90 |
| Colour Temperature | 2700K |
| Lifetime | L80B10 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 1 |
| CIE flux code | 0 0 0 0 95 |
| Binning (SDCM) | 3 |
| Light Direction | Up, Down |
| Measured beam angle (°) | 106.1 |
| Input Voltage | 230V |
| Luminaire power (W) | 47.0 |
| Electrical Class | I |
| IP Rating | 20 |
| Glow wire rating (°C) | 960 |
| Dimming Protocol | Casambi |
| Indoor/Outdoor | Indoor |
| Application | Wall |
| Mounting | Surface |
| Adjustability | Not Applicable |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | Black, Structure |
| Smart Lighting | Casambi |
| Gross weight (g) | 1931.0 |
| Luminous flux per lamp (lm) | 4270 |
| Efficacy (lm/W) | 90 |

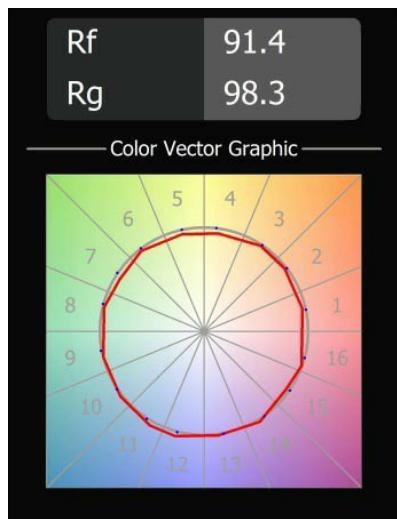TM30 & CRI diagram

Light distribution & beam diagram
