


Date
Customer
Project
Type

*Flat Moon Surface 450 1x LED 4000K 1-10V/Push-Dim DI Black Structure*

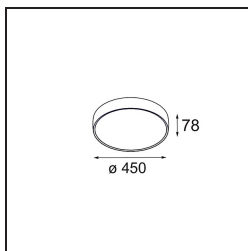

**Specifications**


Material	13290232
Light Source Type	LED
LED Type	FLAT MOON LED
LED technology	LED PCB
CRI	Min. 90
Colour Temperature	4000K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	47 78 95 100 66
Binning (SDCM)	3
Light Direction	Down
Input Voltage	230V
Luminaire power (W)	29.4
Electrical Class	I
IP Rating	20
Glow wire rating (°C)	650
Dimming Protocol	1-10V, Push-Dim
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Surface
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	5990.0
Luminous flux per lamp (lm)	2401
Efficacy (lm/W)	82
Glare rating	22

When minimalist, general lighting design meets the celestial. Our slim and round Flat Moon family offers a LED PCB solution that produces a homogeneous light surface we can't stop looking at. Either full or eclipsed, Flat Moon lights your space with the calm and beauty you expect.

**TM30 & CRI diagram**



**Light distribution & beam diagram**

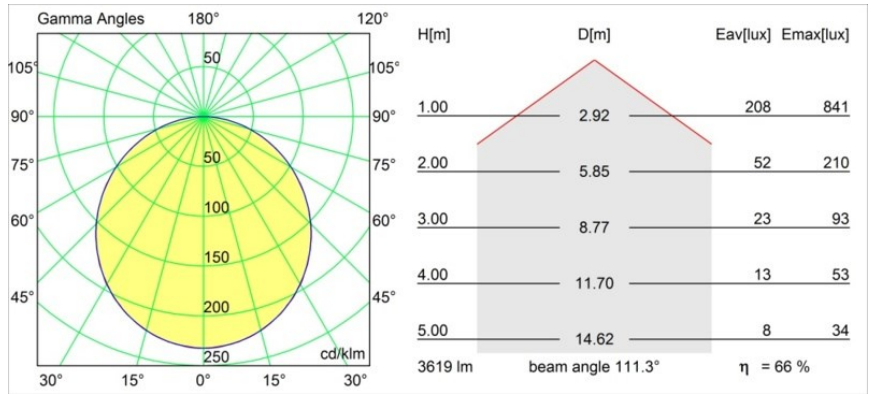

*Optical Accessories*

- 13289000** Diffuser Flat Moon 450 Prismatic
  - 13289100** Diffuser Flat Moon 450 Ice Prismatic
- Choose a required accessory