


Date
Customer
Project
Type

Flat Moon Surface 650 1x LED 3000K DALI/Push-Dim DI White Structure




When minimalist, general lighting design meets the celestial. Our slim and round Flat Moon family offers a LED PCB solution that produces a homogeneous light surface we can't stop looking at. Either full or eclipsed, Flat Moon lights your space with the calm and beauty you expect.




Specifications

Material	13292409
Light Source Type	LED
LED Type	FLAT MOON LED
LED technology	LED PCB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	47 78 95 100 80
Binning (SDCM)	3
Light Direction	Down
Input Voltage	230V
Luminaire power (W)	70.0
Electrical Class	I
IP Rating	20
Glow wire rating (°C)	650
Dimming Protocol	DALI, Push-Dim
DALI Standard	DALI version-1
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Surface
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Gross weight (g)	12300.0
Delivered lumens (lm)	6232
Efficacy (lm/W)	89
Glare rating	23

TM30 & CRI diagram

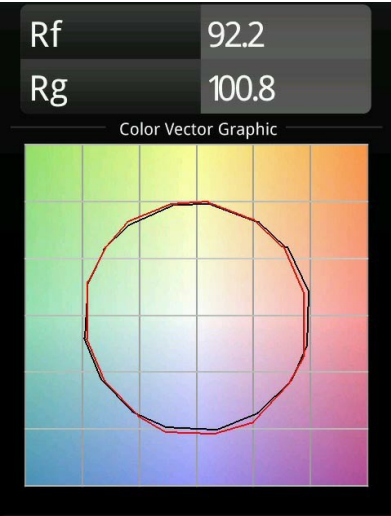

Light distribution & beam diagram

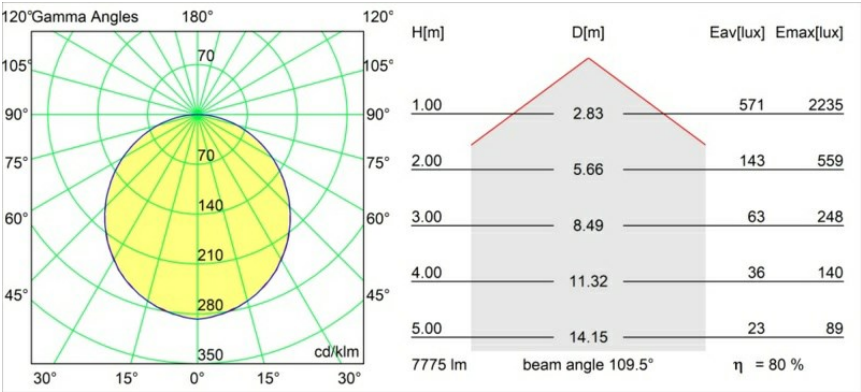



Optical Accessories

13289200 Diffuser Flat Moon 650 Prismatic

13289300 Diffuser Flat Moon 650 Ice Prismatic

☐ Choose a required accessory