

| |
|----------|
| Date |
| Customer |
| Project |
| Type |

Flat Moon Surface 650 1x LED 4000K DALI/Push-Dim DI White Structure



Specifications


| | |
|---------------------------------|----------------------|
| Material | 13292509 |
| Light Source Type | LED |
| LED Type | FLAT MOON LED |
| LED technology | LED PCB |
| CRI | Min. 90 |
| Colour Temperature | 4000K |
| Lifetime | L80B20 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 1 |
| CIE flux code | 47 78 95 100 80 |
| Binning (SDCM) | 3 |
| Light Direction | Down |
| Input Voltage | 230V |
| Luminaire power (W) | 70.0 |
| Electrical Class | I |
| IP Rating | 20 |
| Glow wire rating (°C) | 650 |
| Dimming Protocol | DALI, Push-Dim |
| DALI Standard | DALI version-1 |
| Indoor/Outdoor | Indoor |
| Application | Ceiling |
| Mounting | Surface |
| Adjustability | Not Applicable |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | White, Structure |
| Gross weight (g) | 12300.0 |
| Luminous flux per lamp (lm) | 7077 |
| Efficacy (lm/W) | 101 |
| Glare rating | 24 |

When minimalist, general lighting design meets the celestial. Our slim and round Flat Moon family offers a LED PCB solution that produces a homogeneous light surface we can't stop looking at. Either full or eclipsed, Flat Moon lights your space with the calm and beauty you expect.

TM30 & CRI diagram



Light distribution & beam diagram

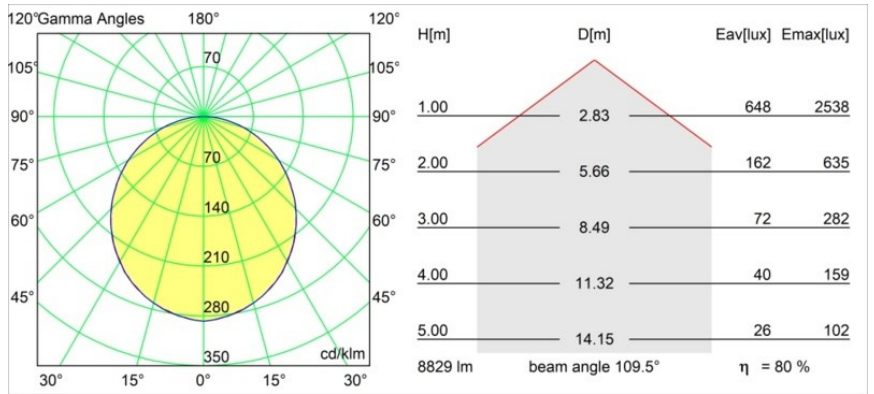

Optical Accessories

13289200 Diffuser Flat Moon 650 Prismatic

13289300 Diffuser Flat Moon 650 Ice Prismatic

Choose a required accessory