


Date
Customer
Project
Type

Flat Moon Surface 950 1x LED 2700K DALI/Push-Dim DI Black Structure




When minimalist, general lighting design meets the celestial. Our slim and round Flat Moon family offers a LED PCB solution that produces a homogeneous light surface we can't stop looking at. Either full or eclipsed, Flat Moon lights your space with the calm and beauty you expect.




Specifications

Material	13294332
Light Source Type	LED
LED Type	FLAT MOON LED
LED technology	LED PCB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	47 79 96 100 81
Binning (SDCM)	3
Light Direction	Down
Input Voltage	230V
Luminaire power (W)	138.0
Electrical Class	I
IP Rating	20
Glow wire rating (°C)	650
Dimming Protocol	DALI, Push-Dim
DALI Standard	DALI version-1
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Surface
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	20550.0
Delivered lumens (lm)	13182
Efficacy (lm/W)	95
Glare rating	23

TM30 & CRI diagram

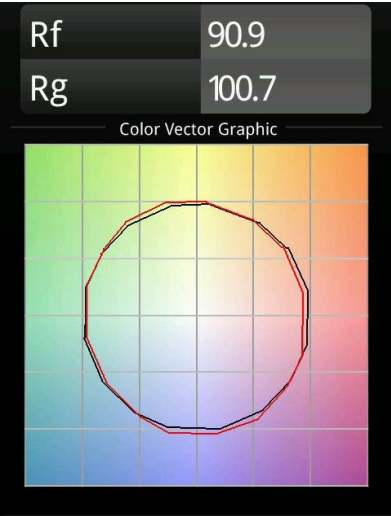

Light distribution & beam diagram

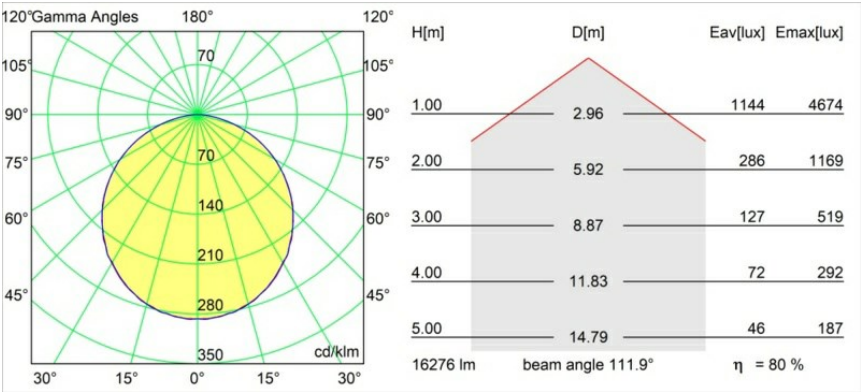


Diagrams



Optical Accessories

13289400 Diffuser Flat Moon 950 Prismatic

13289500 Diffuser Flat Moon 950 Ice Prismatic

 Choose a required accessory

Accessories