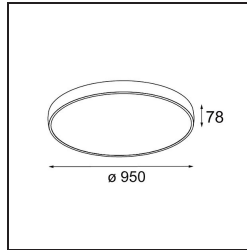|	
Date	
Customer	
Project	
Type	

Flat Moon Suspended Up/Down 950 2x LED 2700K DALI/Push-Dim DI White Structure
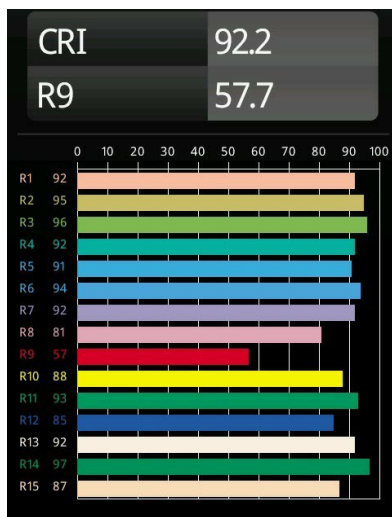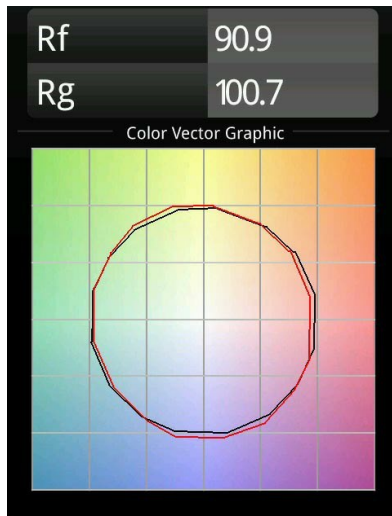
ø 950 · 78

When minimalist, general lighting design meets the celestial. Our slim and round Flat Moon family offers a LED PCB solution that produces a homogeneous light surface we can't stop looking at. Either full or eclipsed, Flat Moon lights your space with the calm and beauty you expect.
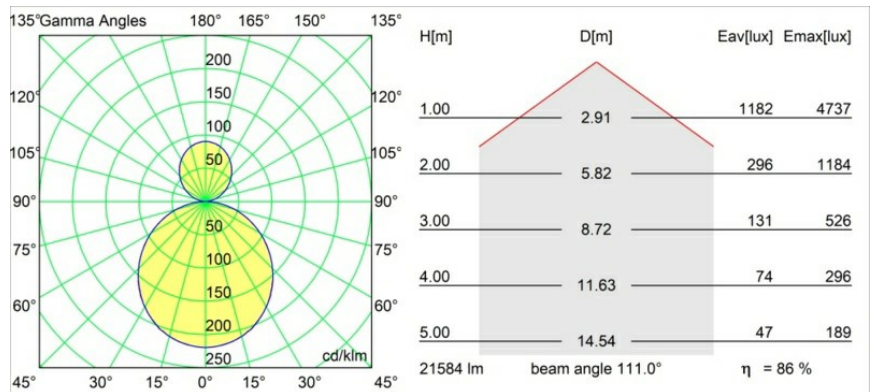
Specifications

Material	13308109
Light Source Type	LED
LED Type	FLAT MOON LED
LED technology	LED PCB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	2
CIE flux code	47 77 95 73 86
Binning (SDCM)	3
Light Direction	Up/Down
Input Voltage	230V
Luminaire power (W)	198.0
Electrical Class	I
IP Rating	20
Glow wire rating (°C)	650
Dimming Protocol	DALI, Push-Dim
DALI Standard	DALI version-1
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Suspended
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Gross weight (g)	23640.0
Luminous flux per lamp (lm)	17605
Efficacy (lm/W)	88
Glare rating	22
Remark	• Suspension kit not included • Suspension kit not included • This is not a complete product. Suspension kit required.

Diagrams

TM30 & CRI diagram

Rf	90.9
Rg	100.7

Color Vector Graphic

CRI	92.2
R9	57.7

R1	92
R2	95
R3	96
R4	92
R5	91
R6	94
R7	92
R8	81
R9	57
R10	88
R11	93
R12	85
R13	92
R14	97
R15	87

Light distribution & beam diagram

H[m]	D[m]	Eav[lux]	Emax[lux]
1.00	2.91	1182	4737
2.00	5.82	296	1184
3.00	8.72	131	526
4.00	11.63	74	296
5.00	14.54	47	189

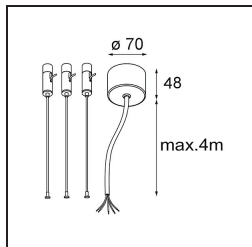21584 lm   beam angle 111.0°   η = 86 %

Optical Accessories

**13289400**   Diffuser Flat Moon 950 Prismatic

13289500   Diffuser Flat Moon 950 Ice Prismatic
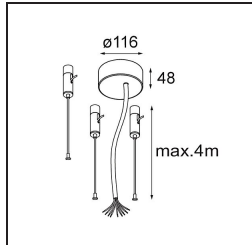
Installation Accessories

11061909   Power Feed and Suspension Kit 4000 Round 5P Flat Moon (3) Straight White Structure
11061932   Power Feed and Suspension Kit 4000 Round 5P Flat Moon (3) Straight Black Structure
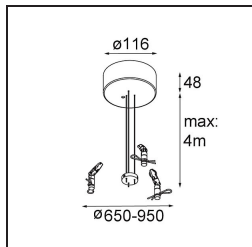

11061832   Power Feed and Suspension Kit 4000 Round 3P Flat Moon (3) Straight Black Structure
11061809   Power Feed and Suspension Kit 4000 Round 3P Flat Moon (3) Straight White Structure
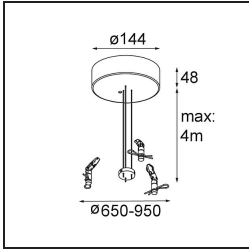

11062409   Power Feed and Suspension Kit Round 9P Flat Moon (3) Straight (Incl. Power Feed Cable & Suspension Cable 4000) White Structure
11062432   Power Feed and Suspension Kit Round 9P Flat Moon (3) Straight (Incl. Power Feed Cable & Suspension Cable 4000) Black Structure

11066109   Power Feed and Suspension Kit Round 5P Flat Moon (3) Triangle (Incl. Power Feed Cable & Suspension Cable 4000) White Structure
11066132   Power Feed and Suspension Kit Round 5P Flat Moon (3) Triangle (Incl. Power Feed Cable & Suspension Cable 4000) Black Structure

ø144

48

max: 4m

ø650-950

11066209   Power Feed and Suspension Kit Round 9P Flat Moon (3) Triangle (Incl. Power Feed Cable & Suspension Cable 4000) White Structure

11066232   Power Feed and Suspension Kit Round 9P Flat Moon (3) Triangle (Incl. Power Feed Cable & Suspension Cable 4000) Black Structure

Choose a required accessory