



Date
Customer
Project
Type

K 120 Recessed Adjustable 120 lx LED 2700K Flood DE White Structure

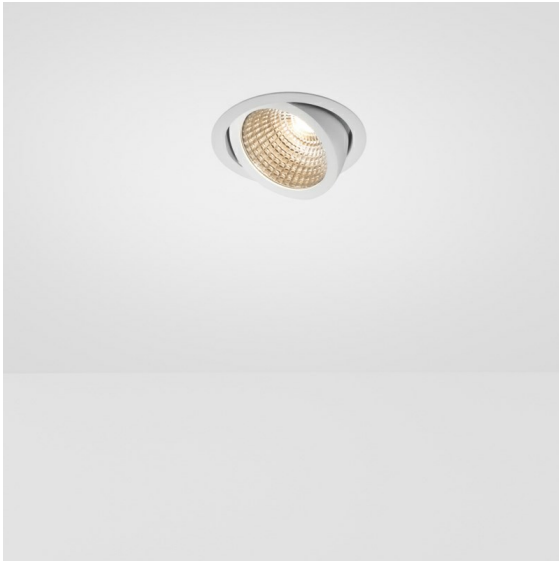


Every project needs a spotlight for general lighting. K is our suggestion for those who like to keep things simple yet flexible. K comes in two sizes, 80 and 89 mm, with a flat or sloping edge, in aluminium, or with a white or black structure. Available with halogen and LED. Choose the directional model for a greater interplay of light and more versatility.

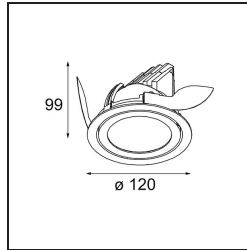


Specifications

Material	13340209		
Light Source Type	LED		
LED Type	LUMILED 1205 GEN 3		
LED technology	LED COB		
CRI	Min. 90		
Colour Temperature	2700K		
Lifetime	L80B20 @50,000 Hours		
Lamp Included	Yes		
Number of Light Sources	1		
Binning (SDCM)	3		
Light Direction	Down		
Optic	Reflector		
Measured beam angle (°)	40.8		
Input Voltage	Constant Current Driver Required		
Electrical Class	III		
IP Rating	20		
Glow wire rating (°C)	960		
Indoor/Outdoor	Indoor		
Application	Ceiling, Wall		
Mounting	Recessed		
Cut-out size (mm)	ø114		
Mounting depth (mm)	200.0		
Adjustability	H 359° V 45°		
Distance to Lighted Object (m)	0,1		
Primary Colour & Primary Finish	White, Structure		
Gross weight (g)	468.0		
Drive current (mA)	350	500	700
Min. forward voltage (Vf)	30,9	31,9	33,2
Max. forward voltage (Vf)	35,7	36,8	38,3
Connected load (W)	11,7	17,2	25,0
Delivered lumens (lm)	1227	1665	2179
Efficacy (lm/W)	105	97	87
Glare rating	21	22	23

TM30 & CRI diagram

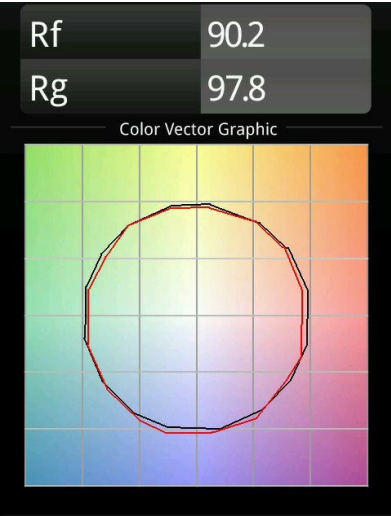


Light distribution & beam diagram

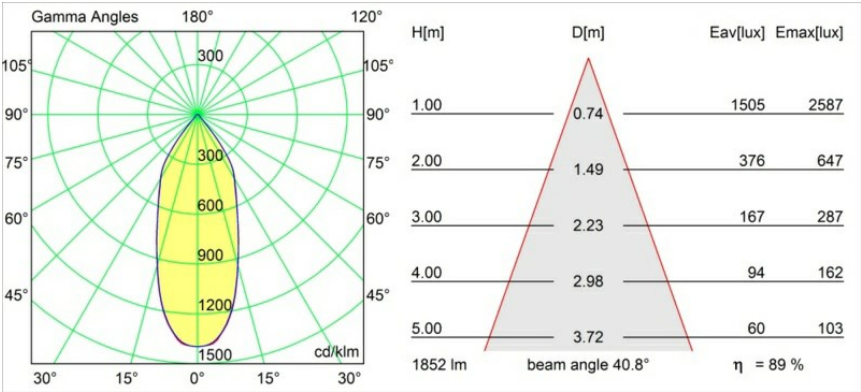


Diagrams


Optical Accessories

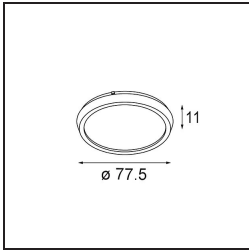

10216903 Spreadlens 80



10212802 Honeycomb 80 Black Matt

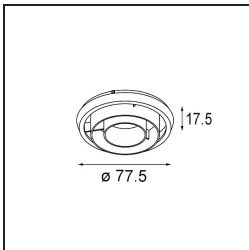

10217002 Crossblade 80 Black Matt

Choose a required accessory