


| |
|----------|
| Date |
| Customer |
| Project |
| Type |

United Surface 1274 1x LED 2700K Non-Dim DI Black Matt





Our Good Design Award-winning United luminaire continues to be a testament to the simple beauty of the fluorescent lamp. That being said, this LED luminaire is anything but ordinary, with a U-shaped housing that is both ceiling and wall-mountable. The light tubes of United are slightly recessed into the housing, emitting light on all sides, including both ends.

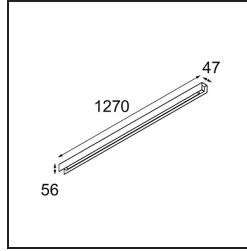


Specifications

| | |
|---------------------------------|----------------------|
| Material | 13390002 |
| Light Source Type | LED |
| LED Type | NLP |
| LED technology | LED PCB |
| CRI | Min. 90 |
| Colour Temperature | 2700K |
| Lifetime | L80B10 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 1 |
| Binning (SDCM) | 2 |
| Light Direction | Down |
| Input Voltage | 230V |
| Luminaire power (W) | 22.0 |
| Electrical Class | I |
| IP Rating | 20 |
| Glow wire rating (°C) | 960 |
| Dimming Protocol | Non-Dim |
| Indoor/Outdoor | Indoor |
| Application | Ceiling, Wall |
| Mounting | Surface |
| Adjustability | Not Applicable |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | Black, Matt |
| Gross weight (g) | 2300.0 |
| Delivered lumens (lm) | 926 |
| Efficacy (lm/W) | 42 |
| Glare rating | 25 |


TM30 & CRI diagram

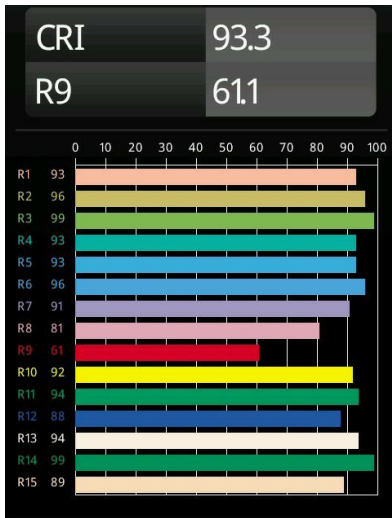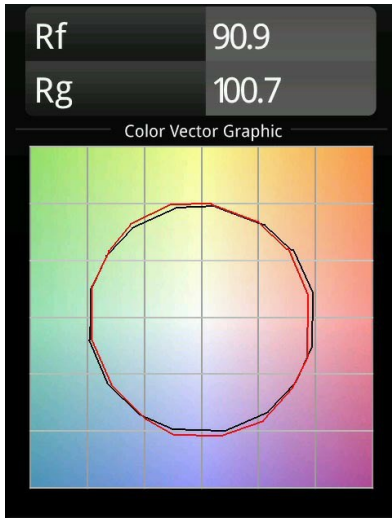

Light distribution & beam diagram

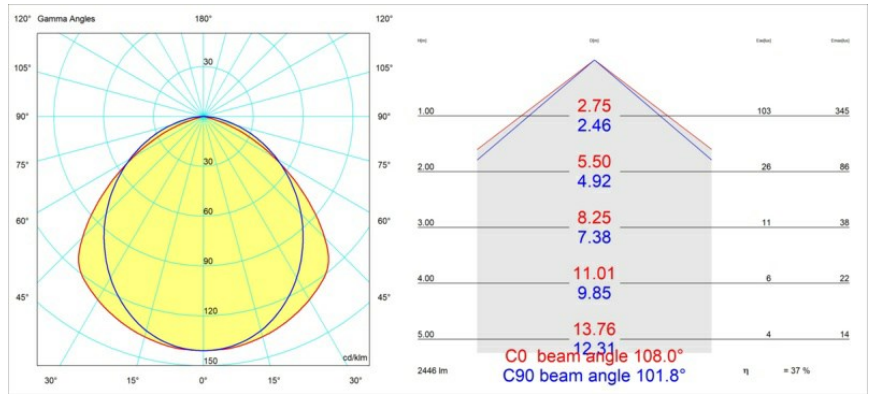


Decorative Accessories

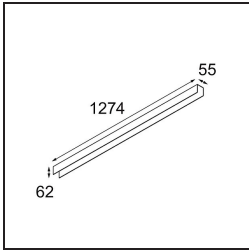


- 13392032** Cover 1274 1x United Black Structure
- 13392009** Cover 1274 1x United White Structure

Installation Accessories



- 11060709** Power Feed and Suspension Kit 4000 Round 3P United (2) Straight White Structure
- 11060732** Power Feed and Suspension Kit 4000 Round 3P United (2) Straight Black Structure



- 11061709** Power Feed and Suspension Kit 4000 Round 5P United (2) Straight White Structure
- 11061732** Power Feed and Suspension Kit 4000 Round 5P United (2) Straight Black Structure

Choose a required accessory