

---

Date

---

Customer

---

Project

---


Type

---

*United Surface 1274 1x LED 2700K Non-Dim DI White Structure*





Our Good Design Award-winning United luminaire continues to be a testament to the simple beauty of the fluorescent lamp. That being said, this LED luminaire is anything but ordinary, with a U-shaped housing that is both ceiling and wall-mountable. The light tubes of United are slightly recessed into the housing, emitting light on all sides, including both ends.

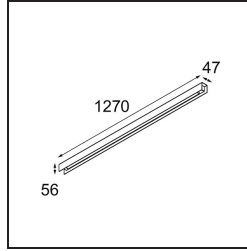


**Specifications**

Material	13390009
Light Source Type	LED
LED Type	NLP
LED technology	LED PCB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
Binning (SDCM)	2
Light Direction	Down
Input Voltage	230V
Luminaire power (W)	22.0
Electrical Class	I
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	Non-Dim
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Surface
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Gross weight (g)	2300.0
Delivered lumens (lm)	1470
Efficacy (lm/W)	66
Glare rating	26


**TM30 & CRI diagram**

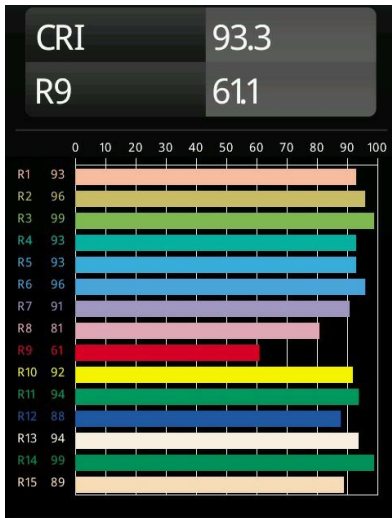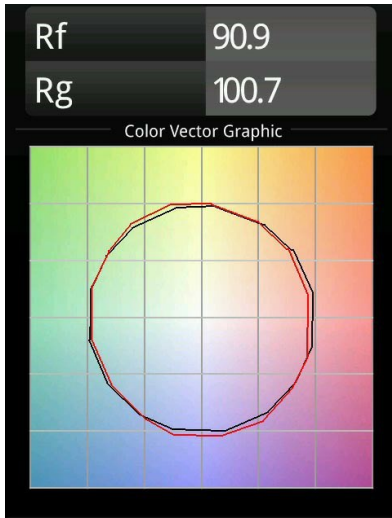

**Light distribution & beam diagram**

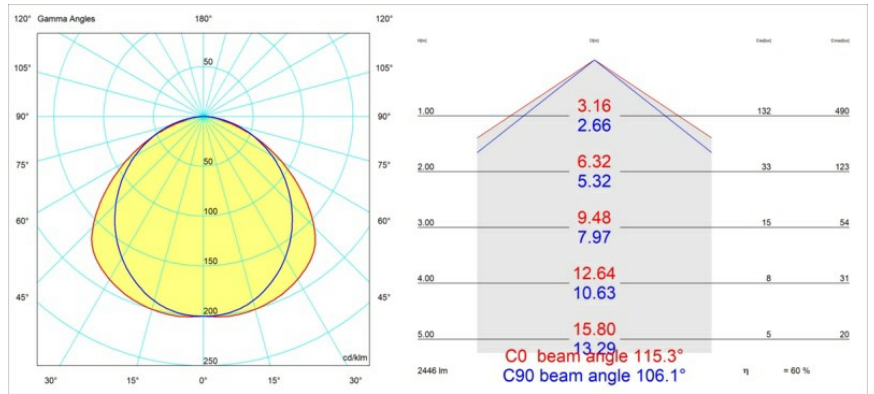


**Decorative Accessories**

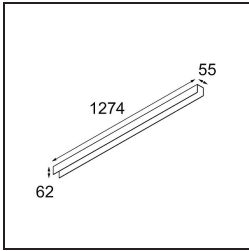


- 13392032** Cover 1274 1x United Black Structure
- 13392009** Cover 1274 1x United White Structure

**Installation Accessories**

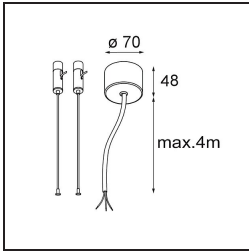

- 11060709** Power Feed and Suspension Kit 4000 Round 3P United (2) Straight White Structure
- 11060732** Power Feed and Suspension Kit 4000 Round 3P United (2) Straight Black Structure

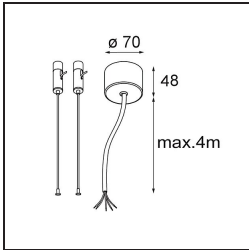

- 11061709** Power Feed and Suspension Kit 4000 Round 5P United (2) Straight White Structure
- 11061732** Power Feed and Suspension Kit 4000 Round 5P United (2) Straight Black Structure

Choose a required accessory