


Date
Customer
Project
Type

*United Surface 1274 2x LED 3000K DALI/Push-Dim DI Black Matt*



Our Good Design Award-winning United luminaire continues to be a testament to the simple beauty of the fluorescent lamp. That being said, this LED luminaire is anything but ordinary, with a U-shaped housing that is both ceiling and wall-mountable. The light tubes of United are slightly recessed into the housing, emitting light on all sides, including both ends.

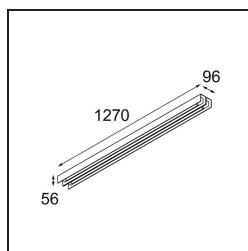


### Specifications

Material	13391502
Light Source Type	LED
LED Type	NLP
LED technology	LED PCB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	2
Binning (SDCM)	2
Light Direction	Down
Input Voltage	230V
Luminaire power (W)	39.0
Electrical Class	I
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI, Push-Dim
DALI Standard	DALI version-1
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Surface
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Matt
Gross weight (g)	4270.0
Luminous flux per lamp (lm)	1914
Efficacy (lm/W)	49
Glare rating	27

**TM30 & CRI diagram**




**Light distribution & beam diagram**

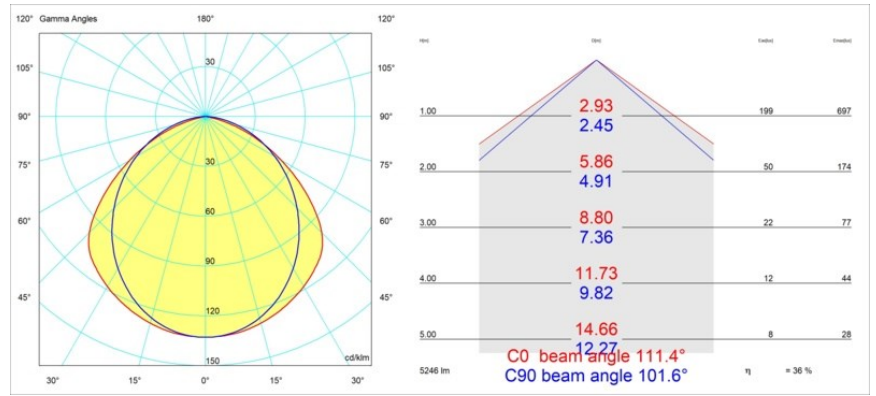

Diagrams

**Decorative Accessories**

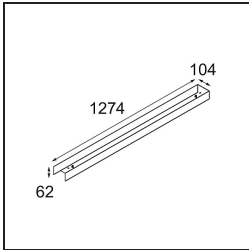

- 13392132** Cover 1274 2x United Black Structure
- 13392109** Cover 1274 2x United White Structure

Choose a required accessory