


Date
Customer
Project
Type

United Surface 1274 2x LED 3000K DALI/Push-Dim DI Black Matt



Our Good Design Award-winning United luminaire continues to be a testament to the simple beauty of the fluorescent lamp. That being said, this LED luminaire is anything but ordinary, with a U-shaped housing that is both ceiling and wall-mountable. The light tubes of United are slightly recessed into the housing, emitting light on all sides, including both ends.

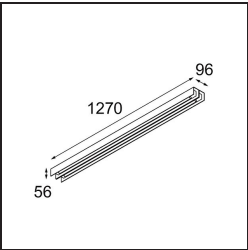

Specifications


Material	13391502
Light Source Type	LED
LED Type	NLP
LED technology	LED PCB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	2
Binning (SDCM)	2
Light Direction	Down
Input Voltage	230V
Luminaire power (W)	39.0
Electrical Class	I
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI, Push-Dim
DALI Standard	DALI version-1
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Surface
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Matt
Gross weight (g)	4270.0
Luminous flux per lamp (lm)	1914
Efficacy (lm/W)	49
Glare rating	27

Specifications


TM30 & CRI diagram



Light distribution & beam diagram

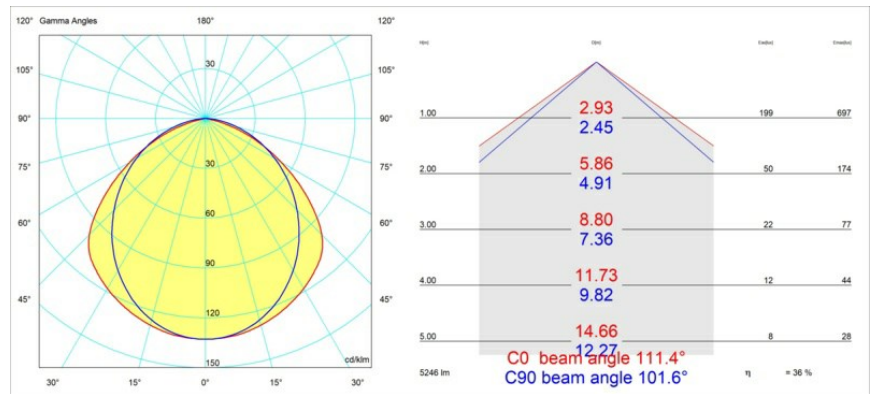

Decorative Accessories

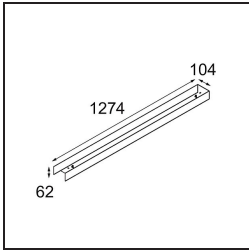

- 13392132** Cover 1274 2x United Black Structure
13392109 Cover 1274 2x United White Structure

Installation Accessories

- 11065209** Power Feed and Suspension Kit 4000 Round 3P United (2) Twin Straight White Structure
11065232 Power Feed and Suspension Kit 4000 Round 3P United (2) Twin Straight Black Structure
11065409 Power Feed and Suspension Kit 4000 Round 5P United (2) Twin Straight White Structure
11065432 Power Feed and Suspension Kit 4000 Round 5P United (2) Twin Straight Black Structure

Choose a required accessory