


Date
Customer
Project
Type

United Surface 974 1x LED 3000K DALI/Push-Dim DI Black Matt



Our Good Design Award-winning United luminaire continues to be a testament to the simple beauty of the fluorescent lamp. That being said, this LED luminaire is anything but ordinary, with a U-shaped housing that is both ceiling and wall-mountable. The light tubes of United are slightly recessed into the housing, emitting light on all sides, including both ends.

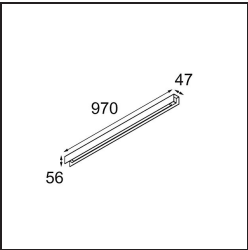

Specifications


Material	13394202
Light Source Type	LED
LED Type	NLP
LED technology	LED PCB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
Binning (SDCM)	2
Light Direction	Down
Input Voltage	230V
Luminaire power (W)	17.0
Electrical Class	I
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI, Push-Dim
DALI Standard	DALI version-1
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Surface
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Matt
Gross weight (g)	1690.0
Luminous flux per lamp (lm)	745
Efficacy (lm/W)	43
Glare rating	25

Specifications


### TM30 & CRI diagram



### Light distribution & beam diagram

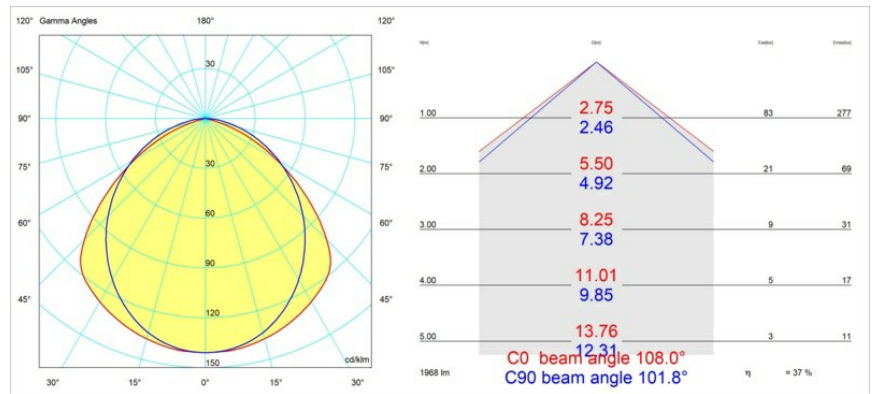


## Decorative Accessories

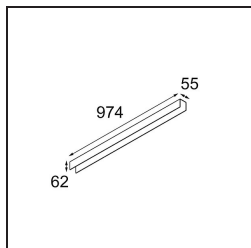


- 13395009** Cover 974 1x United White Structure  
**13395032** Cover 974 1x United Black Structure

## Installation Accessories

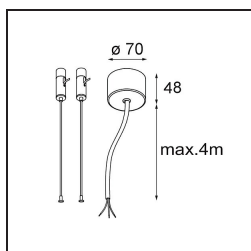

- 11060709** Power Feed and Suspension Kit 4000 Round 3P United (2) Straight White Structure  
**11060732** Power Feed and Suspension Kit 4000 Round 3P United (2) Straight Black Structure

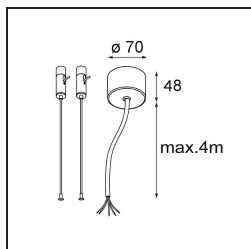

- 11061709** Power Feed and Suspension Kit 4000 Round 5P United (2) Straight White Structure  
**11061732** Power Feed and Suspension Kit 4000 Round 5P United (2) Straight Black Structure

Choose a required accessory