


| |
|----------|
| Date |
| Customer |
| Project |
| Type |

Pista Linear Light Track 48V 2636 1x LED 3000K 1-10V Black Structure

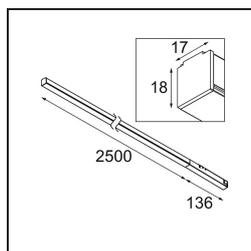


Specifications

| | |
|---------------------------------|----------------------|
| Material | 13413932 |
| Light Source Type | LED |
| LED Type | PISTA LINEAR (FLAPS) |
| LED technology | LED flexible PCB |
| CRI | Min. 90 |
| Colour Temperature | 3000K |
| Lifetime | L80B10 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 1 |
| CIE flux code | 52 82 97 100 61 |
| Binning (SDCM) | 3 |
| Light Direction | Down |
| Input Voltage | 48Vdc |
| Luminaire power (W) | 42.5 |
| Electrical Class | III |
| IP Rating | 20 |
| Glow wire rating (°C) | 960 |
| Dimming Protocol | 1-10V |
| Indoor/Outdoor | Indoor |
| Application | Ceiling, Wall |
| Adjustability | Not Applicable |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | Black, Structure |
| Gross weight (g) | 2010.0 |
| Luminous flux per lamp (lm) | 2583 |
| Efficacy (lm/W) | 60 |
| Glare rating | 27 |

- Remark
- 3500K and 4000K on request
 - White Pista Track 48V linear modules come with a white track adapter. All other Pista Track 48V linear modules have a black track adapter. Exceptions are only possible on request.
 - This is not a complete product. Pista track 48V system required.
 - For installations without dimmer, it is recommended to use 1-10 V luminaires.

Pista is the ultimate in modern aesthetics that introduces thinner and slimmer magnetic track rails, ever smaller light fixtures and ultra-thin cables. Designers can play with different modules on single or multiple track rails in different lengths and colours. The geometrical possibilities are endless.

TM30 & CRI diagram

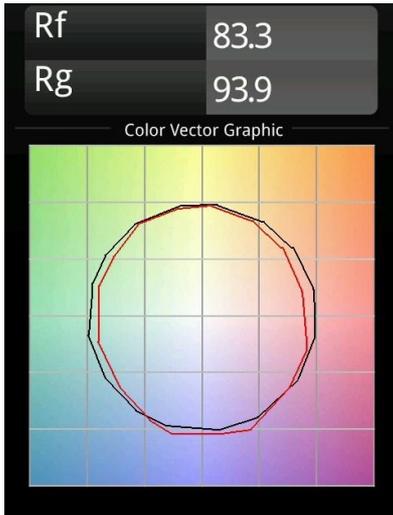

Light distribution & beam diagram

