MODULAR LIGHTING — INSTRUMENTS

Date	
Customer	
Project	
Type	

Pista Linear Light Track 48V 1136 1x LED 3000K DALI White Structure



Pista is the ultimate in modern aesthetics that introduces thinner and slimmer magnetic track rails, ever smaller light fixtures and ultra-thin cables. Designers can play with different modules on single or multiple track rails in different lengths and colours. The geometrical possibilities are endless.

Specifications

Material	13414609
Light Source Type	LED
LED Type	PISTA LINEAR (FLAPS)
LED technology	LED flexible PCB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	52 82 97 100 61
Binning (SDCM)	3
Light Direction	Down
Input Voltage	48Vdc
Luminaire power (W)	17.0
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI
DALI Standard	DALI version-1
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Gross weight (g)	737.0
Luminous flux per lamp (lm)	1033
Efficacy (lm/W)	60
Glare rating	27
Remark	• 3500K and 4000K on request • White Pista Track 48V linear modules come with a white track adapter. All other Pista Track 48V linear modules have a black track adapter. Exceptions are only possible on request. • This is not a complete product. Pista track 48V system required. • For installations without dimmer, it is recommended to use 1-10 V luminaires.

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-23, 03:39:42 PM - ©Modular Lighting Instruments

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-23, 03:39:42 PM - ©Modular Lighting Instruments

TM30 & CRI diagram

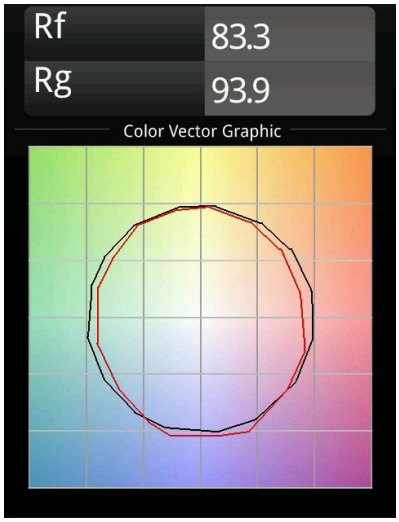

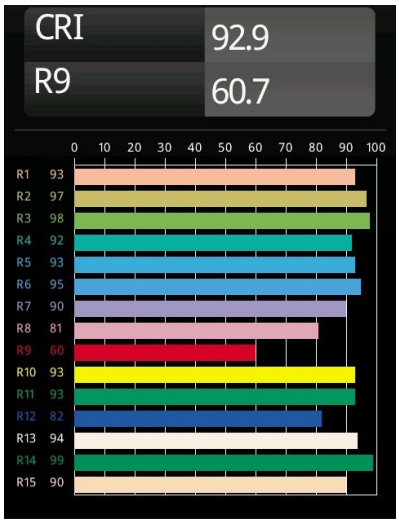
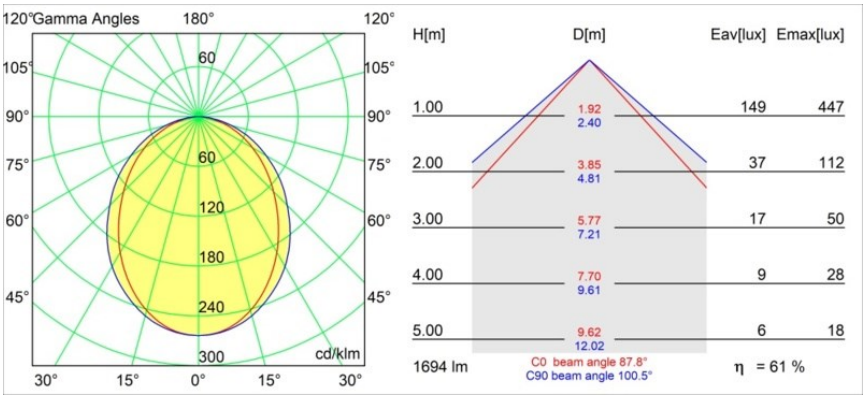
Light distribution & beam diagram