

Date

Customer


Project

Type

## Marbulito Track 48V Adjustable 41 1x LED 2700K Medium DALI White Structure



As a luminaire component for our redesigned Modupoint LED, Marbulito makes a big entrance. Suspended on a long cable, or plugged into Modupoint LED's ceiling base with a short or longer extender stick. In black or in white structure. You'll be seeing pearls of Marbulitos in all kinds of spaces.

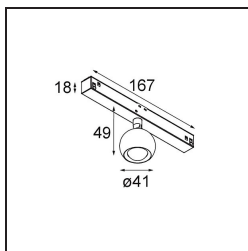


### Specifications

Material	13420109
Light Source Type	LED
LED Type	CREE 1304
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L90B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	99 100 100 100 72
Binning (SDCM)	2
Light Direction	Down
Optic	Lens
Measured beam angle (°)	26.0
Input Voltage	48Vdc
Luminaire power (W)	6.5
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI
DALI Standard	DALI-2
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Adjustability	H 360° V 50°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Gross weight (g)	202.0
Delivered lumens (lm)	332
Efficacy (lm/W)	51
Glare rating	17
Remark	<ul style="list-style-type: none"> <li>• 4000K on request</li> <li>• White Pista 48V luminaires have a white track adapter. All other Pista 48V luminaires have a black track adapter. Deviation from this is only possible on request.</li> <li>• This Track 48V luminaire can not be used in the upper part of a Pista Track 48V Profile</li> </ul>

Suspended Up/Down.

- This is not a complete product. Pista track 48V system required.
  - For installations without dimmer, it is recommended to use 1-10 V luminaires.
-

### TM30 & CRI diagram

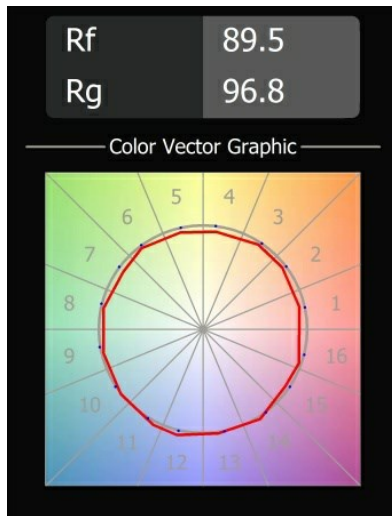

### Light distribution & beam diagram

