


Date
Customer
Project
Type

Marbulito Track 48V Adjustable 41 1x LED 3000K Medium DALI White Structure



As a luminaire component for our redesigned Modupoint LED, Marbulito makes a big entrance. Suspended on a long cable, or plugged into Modupoint LED's ceiling base with a short or longer extender stick. In black or in white structure. You'll be seeing pearls of Marbulitos in all kinds of spaces.

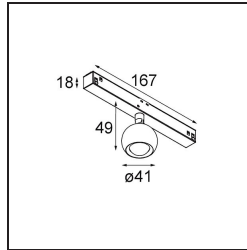


Specifications

Material	13420509
Light Source Type	LED
LED Type	CREE 1304
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L90B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	99 100 100 100 72
Binning (SDCM)	2
Light Direction	Down
Optic	Lens
Measured beam angle (°)	26.0
Input Voltage	48Vdc
Luminaire power (W)	6.5
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI
DALI Standard	DALI-2
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Adjustability	H 360° V 50°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Gross weight (g)	202.0
Luminous flux per lamp (lm)	332
Efficacy (lm/W)	51
Glare rating	17
Remark	<ul style="list-style-type: none"> • 4000K on request • White Pista 48V luminaires have a white track adapter. All other Pista 48V luminaires have a black track adapter. Deviation from this is only possible on request. • This Track 48V luminaire can not be used in the


upper part of a Pista Track 48V Profile
Suspended Up/Down.

- This is not a complete product. Pista track 48V system required.
 - For installations without dimmer, it is recommended to use 1-10 V luminaires.
-

TM30 & CRI diagram

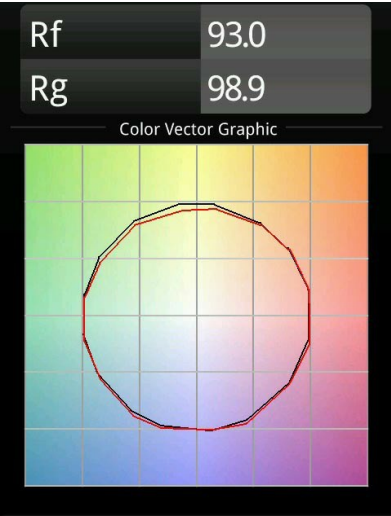

Light distribution & beam diagram

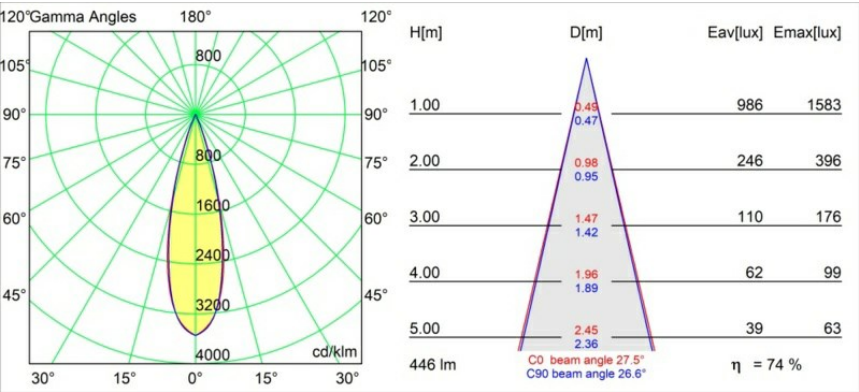

Diagrams