




Date \_\_\_\_\_  
Customer \_\_\_\_\_  
Project \_\_\_\_\_  
Type \_\_\_\_\_

*Marbulito Track 48V Suspended 1x LED 2700K Medium DALI Black Structure*




As a luminaire component for our redesigned Modupoint LED, Marbulito makes a big entrance. Suspended on a long cable, or plugged into Modupoint LED's ceiling base with a short or longer extender stick. In black or in white structure. You'll be seeing pearls of Marbulitos in all kinds of spaces.



### Specifications

Material	13422132
Light Source Type	LED
LED Type	CREE 1304
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L90B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	99 100 100 100 72
Binning (SDCM)	2
Light Direction	Down
Optic	Lens
Measured beam angle (°)	26.0
Input Voltage	48Vdc
Luminaire power (W)	6.5
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI
DALI Standard	DALI-2
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Suspended
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	347.0
Luminous flux per lamp (lm)	332
Efficacy (lm/W)	51
Glare rating	17
Remark	<ul style="list-style-type: none"><li>This is not a complete product. Pista track 48V system required.</li><li>For installations without dimmer, it is recommended to use 1-10 V luminaires.</li></ul>

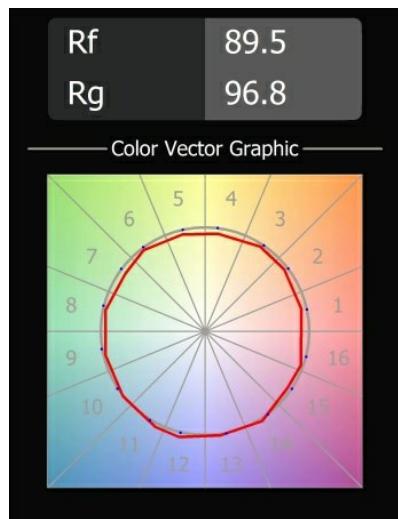

**TM30 & CRI diagram**

**Light distribution & beam diagram**
