


Date
Customer
Project
Гуре

Semih Surface Adjustable 61 1x LED 2700K Trailing Edge DI Black Structure



Semih is an award-winning downlighter with functional positive energy. Inspired by the yin-yang symbol, a sinuous S-shaped line divides Semih in two equal, complementary parts: the hard, solid part mounted to the ceiling and the soft, flexible part housing the light. Now available in two sizes.



Specifications

Specifications				
Material	13440032			
Light Source Type	LED			
LED Type	BRIDGELUX V6 HD G7			
LED technology	LED COB			
CRI	Min. 90			
Colour Temperature	2700K			
Lifetime	L80B10 @50,000 Hours			
Lamp Included	Yes			
Number of Light Sources	1			
CIE flux code	21 94 99 100 100			
Binning (SDCM)	2			
Light Direction	Down			
Input Voltage	230V			
Luminaire power (W)	11.0			
Electrical Class				
IP Rating	20			
Glow wire rating (°C)	960			
Dimming Protocol	Trailing Edge			
Indoor/Outdoor	Indoor			
Application	Ceiling			
Mounting	Surface			
Adjustability	H 355° V -70/+70°			
Distance to Lighted Object (m)	0,1			
Primary Colour & Primary Finish	Black, Structure			
Gross weight (g)	582.0			
Delivered lumens (Im)	704			
Efficacy (Im/W)	64			
Glare rating	21			
Remark	 3500K and 4000K on request Magnetic reflector or lens not included 3500K and 4000K on request 			




Diagrams

TM30 & CRI diagram





Light distribution & beam diagram

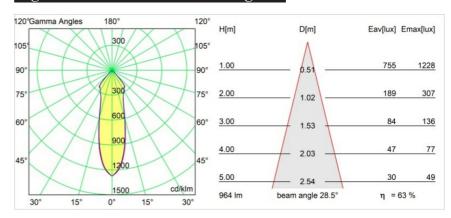



Optical Accessories

10217003	l ens	57	Medium
	20110	0.	moundin

- **10218030** Reflector 57 Spot Aluminium Anodised
- 10218130 Reflector 57 Medium Aluminium Anodised
- 10218430 Reflector 57 Flood Gold Anodised
- 10218230 Reflector 57 Flood Aluminium Anodised
- 10218630 Reflector 57 Flood Champagne Anodised

Choose a required accessory