



Date
Customer
Project
Type

*Semih Surface Adjustable 61 1x LED 1800-3000K WD Trailing Edge DI White Structure*

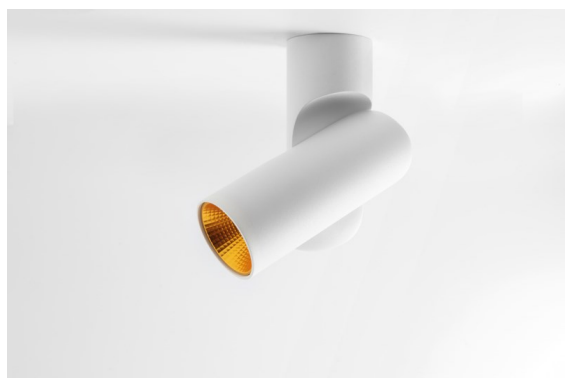

Semih is an award-winning downlighter with functional positive energy. Inspired by the yin-yang symbol, a sinuous S-shaped line divides Semih in two equal, complementary parts: the hard, solid part mounted to the ceiling and the soft, flexible part housing the light. Now available in two sizes.

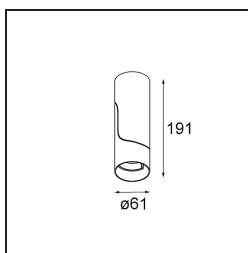


### Specifications

Material	13440609
Light Source Type	LED
LED Type	BRIDGELUX WARMDIM 12W
LED technology	LED COB
CRI	Min. 95
Colour Temperature	1800-3000K (Warm Dim)
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	95 100 100 100 91
Binning (SDCM)	3
Light Direction	Down
Input Voltage	230V
Luminaire power (W)	15.0
Electrical Class	I
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	Trailing Edge
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Surface
Adjustability	H 360° V -70/+70°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Gross weight (g)	582.0
Luminous flux per lamp (lm)	928
Efficacy (lm/W)	61
Glare rating	20
Remark	<ul style="list-style-type: none"> <li>• 3500K and 4000K on request</li> <li>• Magnetic reflector or lens not included</li> <li>• 3500K and 4000K on request</li> </ul>

**TM30 & CRI diagram**



**Light distribution & beam diagram**

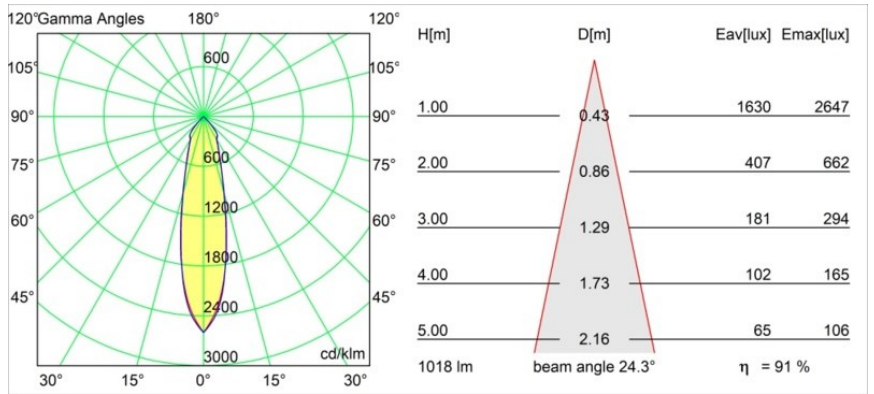

Diagrams

### *Optical Accessories*

- **10218730** Reflector 57 Medium WD Aluminium Anodised
- **10219030** Reflector 57 Flood WD Gold Anodised
- **10218830** Reflector 57 Flood WD Aluminium Anodised
- **10219230** Reflector 57 Flood WD Champagne Anodised
- Choose a required accessory