


| |
|----------|
| Date |
| Customer |
| Project |
| Type |

FFD_Pista Linear Light Flaps Track 48V 1136 1x LED 2700K 1-10V DI Black Structure

Pista is the ultimate in modern aesthetics that introduces thinner and slimmer magnetic track rails, ever smaller light fixtures and ultra-thin cables. Designers can play with different modules on single or multiple track rails in different lengths and colours. The geometrical possibilities are endless.

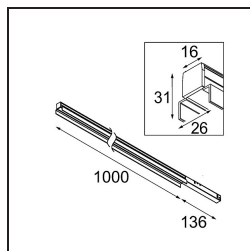

Specifications

| | |
|---------------------------------|----------------------|
| Material | 13450132 |
| Light Source Type | LED |
| LED Type | PISTA LINEAR (FLAPS) |
| LED technology | LED flexible PCB |
| CRI | Min. 90 |
| Colour Temperature | 2700K |
| Lifetime | L80B10 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 1 |
| CIE flux code | 68 93 99 100 45 |
| Binning (SDCM) | 3 |
| Light Direction | Down |
| Optic | Lens |
| Input Voltage | 48Vdc |
| Luminaire power (W) | 17.0 |
| Electrical Class | III |
| IP Rating | 20 |
| Glow wire rating (°C) | 960 |
| Dimming Protocol | 1-10V |
| Indoor/Outdoor | Indoor |
| Application | Ceiling, Wall |
| Adjustability | Not Applicable |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | Black, Structure |
| Gross weight (g) | 859.0 |
| Luminous flux per lamp (lm) | 729 |
| Efficacy (lm/W) | 42 |
| Glare rating | 15 |


Remark

- 3500K and 4000K on request
 - This black Track 48V linear module comes with a black track adapter. Exceptions are only possible on request.
 - This Track 48V luminaire can not be used in the upper part of a Pista Track 48V Profile Suspended Up/Down.
 - This is not a complete product. Pista track 48V system required.
 - For installations without dimmer, it is recommended to use 1-10 V luminaires.
-

TM30 & CRI diagram



Light distribution & beam diagram

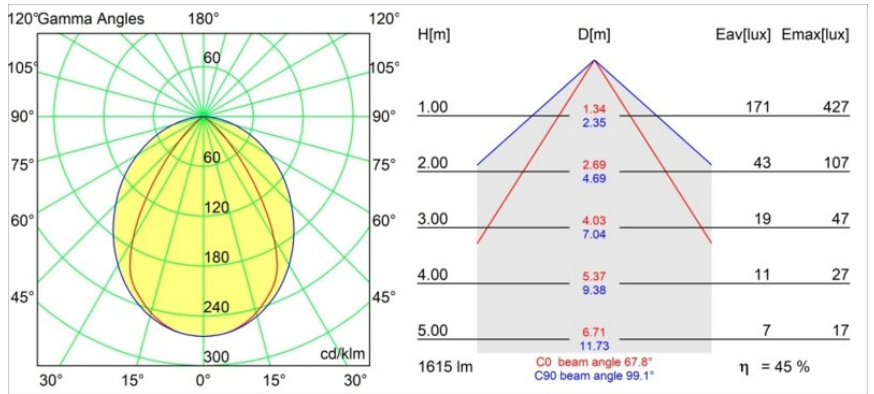

Diagrams