




Date _____
Customer _____
Project _____
Type _____

Pista Linear Spots Track 48V 429 1x LED 2700K Medium DALI Black Structure




Specifications

Material	13460432
Light Source Type	LED
LED Type	PISTA LINEAR SPOTS (16x)
LED technology	LED PCB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L90B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	96 100 100 100 81
Binning (SDCM)	3
Light Direction	Down
Optic	Collimator
Measured beam angle (°)	27.9
Input Voltage	48Vdc
Luminaire power (W)	19.0
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI
DALI Standard	DALI-2
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	188.0
Luminous flux per lamp (lm)	1428
Efficacy (lm/W)	75
Glare rating	16
Remark	<ul style="list-style-type: none">• 3500K on request• White Pista Track 48V linear modules come with a white track adapter. All other Pista Track 48V linear modules have a black track adapter. Exceptions are only possible on request.• This is not a complete product. Pista track 48V

Pista is the ultimate in modern aesthetics that introduces thinner and slimmer magnetic track rails, ever smaller light fixtures and ultra-thin cables. Designers can play with different modules on single or multiple track rails in different lengths and colours. The geometrical possibilities are endless.

system required.

- For installations without dimmer, it is recommended to use 1-10 V luminaires.

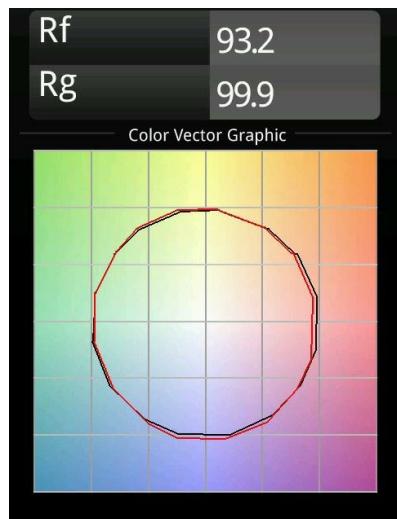TM30 & CRI diagram

Light distribution & beam diagram
