


| |
|----------|
| Date |
| Customer |
| Project |
| Type |

Pista Linear Spots Track 48V 429 1x LED 3000K Flood DALI White Structure



Pista is the ultimate in modern aesthetics that introduces thinner and slimmer magnetic track rails, ever smaller light fixtures and ultra-thin cables. Designers can play with different modules on single or multiple track rails in different lengths and colours. The geometrical possibilities are endless.

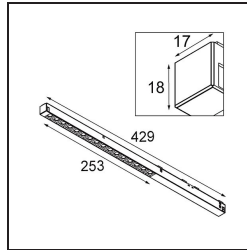



Specifications

| | |
|---------------------------------|--|
| Material | 13460709 |
| Light Source Type | LED |
| LED Type | PISTA LINEAR SPOTS (16x) |
| LED technology | LED PCB |
| CRI | Min. 90 |
| Colour Temperature | 3000K |
| Lifetime | L90B20 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 1 |
| CIE flux code | 91 98 100 100 79 |
| Binning (SDCM) | 3 |
| Light Direction | Down |
| Optic | Collimator |
| Measured beam angle (°) | 39.1 |
| Input Voltage | 48Vdc |
| Luminaire power (W) | 19.0 |
| Electrical Class | III |
| IP Rating | 20 |
| Glow wire rating (°C) | 960 |
| Dimming Protocol | DALI |
| DALI Standard | DALI-2 |
| Indoor/Outdoor | Indoor |
| Application | Ceiling, Wall |
| Adjustability | Not Applicable |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | White, Structure |
| Gross weight (g) | 188.0 |
| Luminous flux per lamp (lm) | 1498 |
| Efficacy (lm/W) | 78 |
| Glare rating | 20 |
| Remark | <ul style="list-style-type: none"> • 3500K on request • White Pista Track 48V linear modules come with a white track adapter. All other Pista Track 48V linear modules have a black track adapter. Exceptions are only possible on request. • This is not a complete product. Pista track 48V |

system required.

- For installations without dimmer, it is recommended to use 1-10 V luminaires.
-

TM30 & CRI diagram

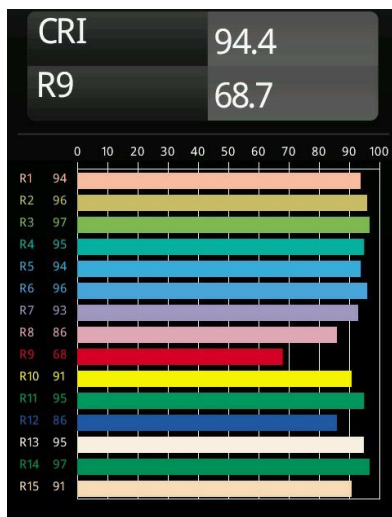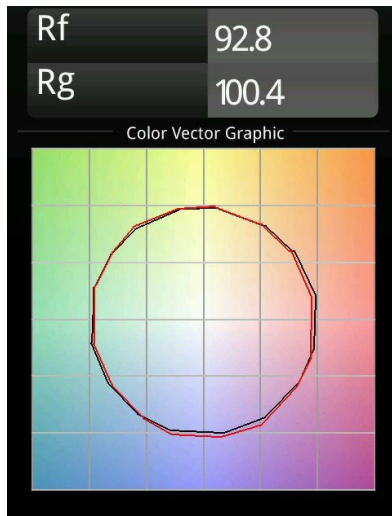

Light distribution & beam diagram

