


| |
|----------|
| Date |
| Customer |
| Project |
| Type |

Pista Linear Spots Track 48V 302 1x LED 2700K Flood 1-10V White Structure



Pista is the ultimate in modern aesthetics that introduces thinner and slimmer magnetic track rails, ever smaller light fixtures and ultra-thin cables. Designers can play with different modules on single or multiple track rails in different lengths and colours. The geometrical possibilities are endless.

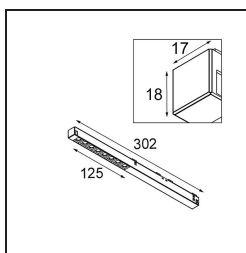


Specifications

| | |
|---------------------------------|--|
| Material | 13461109 |
| Light Source Type | LED |
| LED Type | PISTA LINEAR SPOTS (8x) |
| LED technology | LED PCB |
| CRI | Min. 90 |
| Colour Temperature | 2700K |
| Lifetime | L90B20 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 1 |
| CIE flux code | 92 98 100 100 75 |
| Binning (SDCM) | 3 |
| Light Direction | Down |
| Optic | Collimator |
| Measured beam angle (°) | 38.9 |
| Input Voltage | 48Vdc |
| Luminaire power (W) | 9.0 |
| Electrical Class | III |
| IP Rating | 20 |
| Glow wire rating (°C) | 960 |
| Dimming Protocol | 1-10V |
| Indoor/Outdoor | Indoor |
| Application | Ceiling, Wall |
| Adjustability | Not Applicable |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | White, Structure |
| Gross weight (g) | 112.0 |
| Luminous flux per lamp (lm) | 653 |
| Efficacy (lm/W) | 72 |
| Glare rating | 19 |
| Remark | <ul style="list-style-type: none"> • 3500K on request • White Pista Track 48V linear modules come with a white track adapter. All other Pista Track 48V linear modules have a black track adapter. Exceptions are only possible on request. • This is not a complete product. Pista track 48V system required. • For installations without dimmer, it is |

recommended to use 1-10 V luminaires.

TM30 & CRI diagram

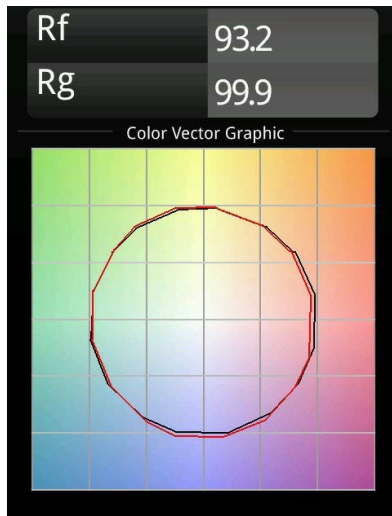

Light distribution & beam diagram

