

Pista Linear Spots Track 48V 302 lx LED 2700K Flood DALI White Structure

Specifications

Material	13461509
Light Source Type	LED
LED Type	PISTA LINEAR SPOTS (8x)
LED technology	LED PCB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L90B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	92 98 100 100 75
Binning (SDCM)	3
Light Direction	Down
Optic	Collimator
Measured beam angle (°)	38.9
Input Voltage	48Vdc
Luminaire power (W)	9.0
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI
DALI Standard	DALI-2
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Gross weight (g)	112.0
Luminous flux per lamp (lm)	653
Efficacy (lm/W)	72
Glare rating	19
Remark	<ul style="list-style-type: none"> • 3500K and 4000K on request • This is not a complete product. Pista track 48V system required. • For installations without dimmer, it is recommended to use 1-10 V luminaires.

Pista is the ultimate in modern aesthetics that introduces thinner and slimmer magnetic track rails, ever smaller light fixtures and ultra-thin cables. Designers can play with different modules on single or multiple track rails in different lengths and colours. The geometrical possibilities are endless.

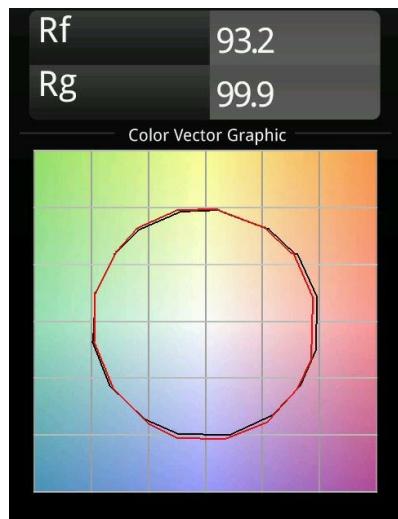


MODULAR
LIGHTING —
INSTRUMENTS

Pista Linear Spots Track 48V 302 Ix LED 2700K Flood DALI

White Structure

TM30 & CRI diagram



Light distribution & beam diagram

