


Date
Customer
Project
Type

Marbul Track 230V Adjustable 109 1x LED 2700K DALI DI Black Structure




Marbul is a timeless, spherical accent luminaire. Its pure geometrical shape makes it easily fit in every interior. Why designers love it so? The attention to detail and the simplicity of the shape present a minimalistic, elegant and versatile design for those looking to experiment with organic lighting.

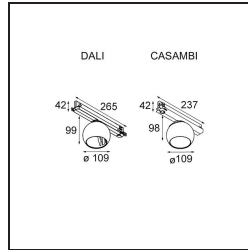


Specifications

Material	13500032
Light Source Type	LED
LED Type	CREE 1507
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	100 100 100 100 88
Binning (SDCM)	2
Light Direction	Down
Input Voltage	230V
Luminaire power (W)	8.5
Electrical Class	II
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI
DALI Standard	DALI-2
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Adjustability	H 360° V 45°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	1273.0
Delivered lumens (lm)	634
Efficacy (lm/W)	74
Glare rating	14
Remark	<ul style="list-style-type: none"> • 4000K on request • Magnetic reflector not included • 4000K on request • This is not a complete product. Magnetic reflector and track 230V system required. • This is not a complete product. Magnetic reflector and track 230V system required.

TM30 & CRI diagram

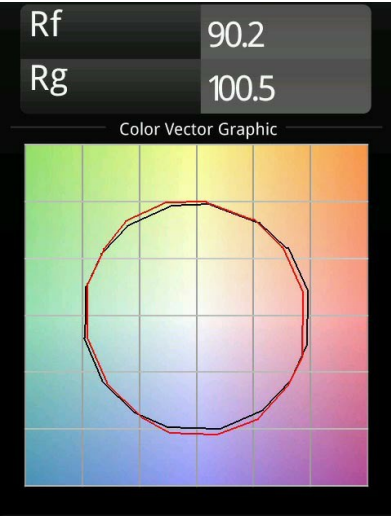

Light distribution & beam diagram

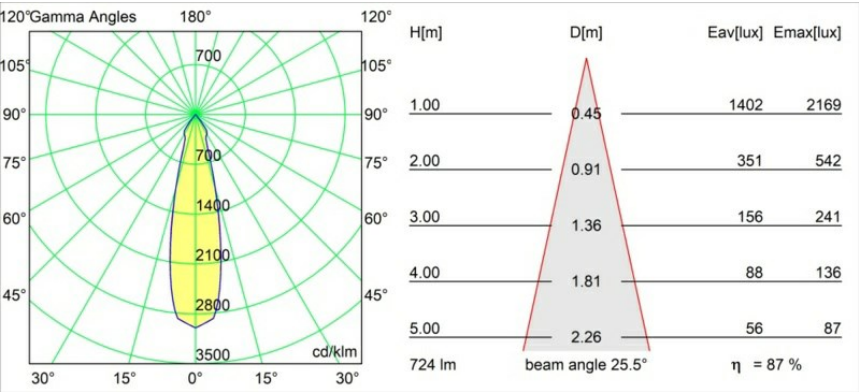

Diagrams

Optical Accessories

- 10216830

Reflector 82 Super Spot Aluminium Anodised
- 10216930

Reflector 82 Super Spot Champagne Anodised
- 10217030

Reflector 82 Super Spot Gold Anodised
- 10217130

Reflector 82 Medium Aluminium Anodised
- 10217230

Reflector 82 Medium Champagne Anodised
- 10217330

Reflector 82 Medium Gold Anodised
- 10217430

Reflector 82 Flood Aluminium Anodised
- 10217530

Reflector 82 Flood Champagne Anodised
- 10217630

Reflector 82 Flood Gold Anodised
- Choose a required accessory

Accessories