




Date _____
Customer _____
Project _____
Type _____

Marbul Track 230V Suspended 109 Ix LED 3000K Casambi DI White Structure

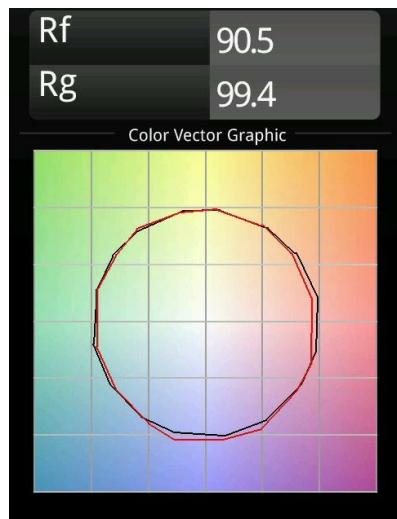
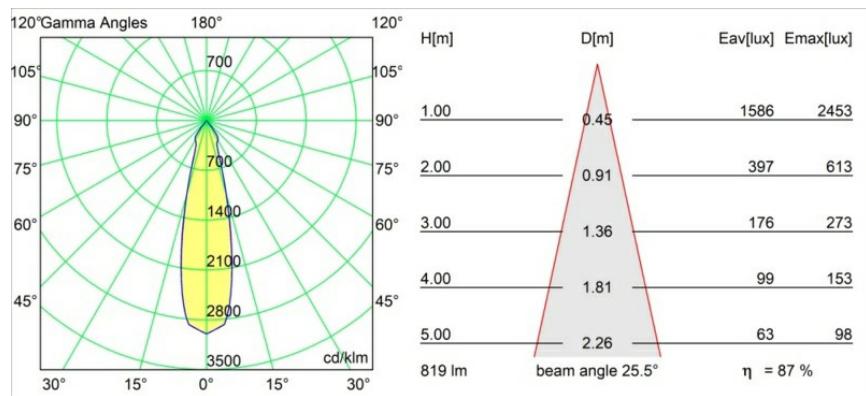


Marbul is a timeless, spherical accent luminaire. Its pure geometrical shape makes it easily fit in every interior. Why designers love it so? The attention to detail and the simplicity of the shape present a minimalist, elegant and versatile design for those looking to experiment with organic lighting.



Specifications

Material	13501609
Light Source Type	LED
LED Type	CREE 1507
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	100 100 100 100 88
Binning (SDCM)	2
Light Direction	Down
Input Voltage	230V
Luminaire power (W)	8.5
Electrical Class	II
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	Casambi
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Suspended
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Smart Lighting	Casambi
Gross weight (g)	1317.0
Luminous flux per lamp (lm)	718
Efficacy (lm/W)	84
Glare rating	15
Remark	<ul style="list-style-type: none">• Magnetic reflector not included• This is not a complete product. Magnetic reflector and track 230V system required.• This is not a complete product. Magnetic reflector and track 230V system required.

TM30 & CRI diagram

Light distribution & beam diagram


Optical Accessories

10216830 Reflector 82 Super Spot Aluminium Anodised

10216930 Reflector 82 Super Spot Champagne Anodised

10217030 Reflector 82 Super Spot Gold Anodised

10217130 Reflector 82 Medium Aluminium Anodised

10217230 Reflector 82 Medium Champagne Anodised

10217330 Reflector 82 Medium Gold Anodised

10217430 Reflector 82 Flood Aluminium Anodised

10217530 Reflector 82 Flood Champagne Anodised

10217630 Reflector 82 Flood Gold Anodised

Choose a required accessory