

Date
Customer
Project
Гуре

Tetrix Oblique Recessed 62 1x IP55 LED 2700K Flood DE White Matt



Playing with pieces, fitting them together in all kinds of intricate ways. Tetrix invites you to give it your personal touch with design options and accessories. It's versatile, fits everywhere, and is a breeze to install.

92 92 0 62	Friends of
------------------	------------

Specifications

Specifications		
Material	13512138	
Light Source Type	LED	
LED Type	BRIDGELUX	K V8G8
LED technology	LED COB	
CRI	Min. 90	
Colour Temperature	2700K	
Lifetime	L90B10 @5	0,000 Hours
Lamp Included	Yes	
Number of Light Sources	1	
CIE flux code	98 99 100 1	00 100
Binning (SDCM)	2	
Light Direction	Down	
Optic	Collimator	
Measured beam angle (°)	39.0	
Input Voltage	Constant Co	urrent Driver Required
Electrical Class	III	
IP Rating	55	
Glow wire rating (°C)	850	
Indoor/Outdoor	Indoor	
Application	Ceiling, Wa	1
Mounting	Recessed	
Cut-out size (mm)	ø68 for Fra TrimLess	me Recessed; ø89 for Frame Recessed
Mounting depth (mm)	110.0	
Adjustability	Not Applica	ble
Distance to Lighted Object (m)	0,1	
Primary Colour & Primary Finish	White, Matt	
Gross weight (g)	148.0	
Drive current (mA)	350	500
Min. forward voltage (Vf)	13,2	13,7
Max. forward voltage (Vf)	15,0	15,4
Connected load (W)	5,0	7,2
Delivered lumens (lm)	509 0	688
Efficacy (Im/W)	102	96
Glare rating	16	17
Remark	Tetrix Rec	cessed Ring or Tube Surface not

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly Latest datasheet and documentation available on www.supermodular.com - 2025-07-29, 06:12:10 AM - ©Modular Lighting Instruments




included

- This is not a complete product. Tetrix Recessed Ring or Tube Surface required.
- This is not a complete product. Tetrix Recessed Ring or Tube Surface required.




TM30 & CRI diagram






Light distribution & beam diagram

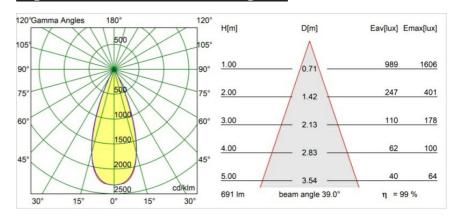

Diagrams




Optical Accessories




 13515032
 Snoot 32 Black Structure

 13515038
 Snoot 32 White Matt




13515132

Honeycomb 33 Black Structure




13515232Light Cone 44 Black Structure13515238Light Cone 44 White Matt

Installation Accessories




13510083Ring Recessed 62 1x IP55 Black Matt13510038Ring Recessed 62 1x IP55 White Matt




13515430 Ring Recessed Trimless 62 1x







13515530 Concrete Kit 62 150x150 1x




13515630 Concrete Ring 62 Standard Installation Housing



12293230 Plaster Kit Trimless 150x150 - 62 1x



11624030 Installation Housing 140x250x100x210



12292630 Gypsum Fibreboard 150x150

Choose a required accessory