MODULAR LIGHTING — INSTRUMENTS

Date	
Customer	
Project	
Type	

Tetrix Adjustable Recessed 62 1x IP55 LED 3000K Flood DE Black Chrome

Giocare con i vari pezzi, incastrarli nei modi più intricati. Tetrix ti invita a lasciare il tuo tocco personale con varie opzioni di design e accessori. È versatile, si adatta a qualsiasi luogo ed è facile da installare.



Specifications

Materiale	13514380	
Tipo di Sorgente	LED	
Tipologia LED	BRIDGELUX V8G8	
Tecnologie LED	COB	
CRI	Min. 90	
Temperatura di colore della luce	3000K	
Vita utile	L90B10 @50.000 ore	
Lampadina inclusa	Sì	
Numero di fonte luminosa	1	
Codice di flusso CIE	98 100 100 100 99	
Binning (SDCM)	2	
Direzione della luce	Diretta	
Ottiche	Collimatore	
Fascio misurato (°)	38,0	
Volt in ingresso	Necessario driver a corrente costante	
Classificazione elettrica	III	
Grado IP	55	
Test filo a caldo (°C)	850	
Interno/Esterno	Interno	
Applicazione	Soffitto, Parete	
Montaggio	Incassato	
Foro d'incasso (mm)	ø68 for Frame Recessed; ø89 for Frame Recessed TrimLess	
Profondità di montaggio (mm)	110,0	
Orientabilità	H 355° V 25°	
Distanza dall'oggetto illuminato (m)	0,1	
Colore primario & Finitura primaria	Nero, Cromato	
Peso lordo (g)	141,0	
Corrente di azionamento (mA)	350	500
Min. forward voltage (Vf)	13,2	13,7
Max. forward voltage (Vf)	15,0	15,4
Connected load (W)	5,0	7,2
Flusso luminoso per lampade (lm)	555	744
Efficienza (lm/W)	111	103

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-15, 02:40:01 PM - ©Modular Lighting Instruments

Livello abbagliamento	14 15
Remark	• Tetrix Recessed Ring o Tube Surface non incluso • Questo non è un prodotto completo. È necessario un Tetrix Recessed Ring o Tube Surface. • Questo non è un prodotto completo. È necessario un Tetrix Recessed Ring o Tube Surface.

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-15, 02:40:01 PM - ©Modular Lighting Instruments

TM30 & CRI diagram

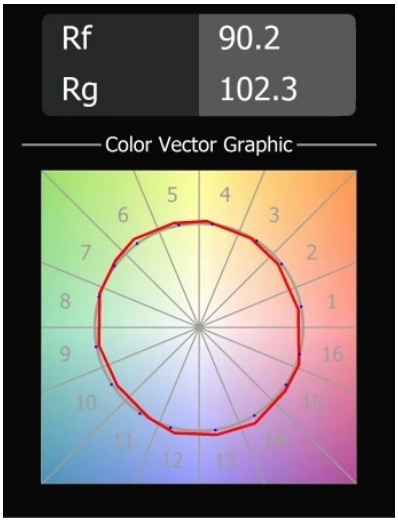

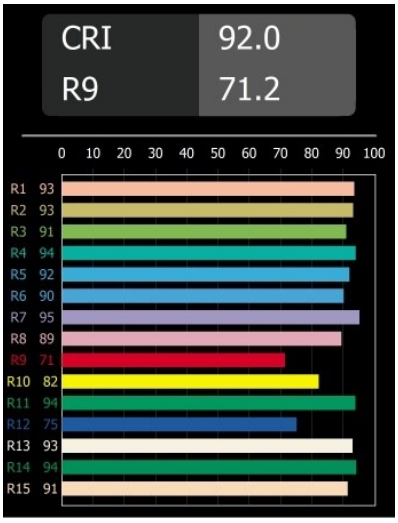

Light distribution & beam diagram

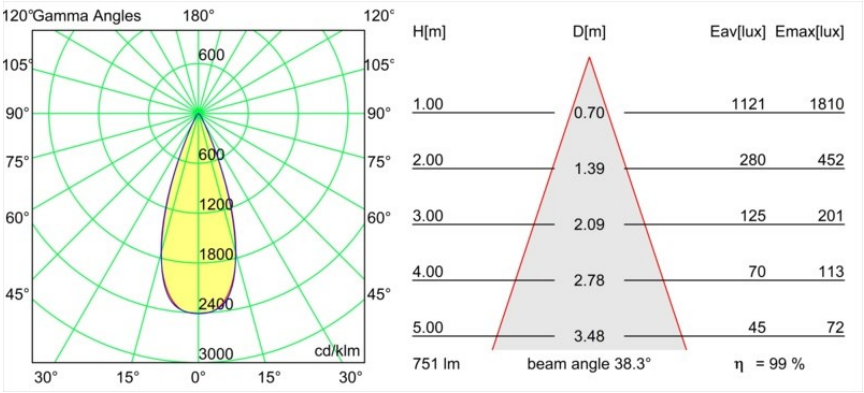

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-15, 02:40:01 PM - ©Modular Lighting Instruments

Accessorio Ottico



13515032 Snoot 32 Black Structure
13515038 Snoot 32 White Matt



13515132 Honeycomb 33 Black Structure

Accessori Installazione



13510083 Ring Recessed 62 1x IP55 Black Matt
13510038 Ring Recessed 62 1x IP55 White Matt



13515430 Ring Recessed Trimless 62 1x



13515530 Concrete Kit 62 150x150 1x

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-15, 02:40:01 PM - ©Modular Lighting Instruments



13515630 Concrete Ring 62 Standard Installation Housing



12293230 Plaster Kit Trimless 150x150 - 62 1x



11624030 Installation Housing 140x250x100x210



12292630 Gypsum Fibreboard 150x150



13515738 Tetrix Tube Surface 65 125 1x DE White Matt
13515783 Tetrix Tube Surface 65 125 1x DE Black Matt

Choose a required accessory

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-15, 02:40:01 PM - ©Modular Lighting Instruments