


Extruded Suspended 46 300 1x LED 1800-3000K WD Flood DE Black Anodised - Bronze Brushed Anodised



This statement luminaire loves to play with light when it's on and when it's off. Its strong lines bring vertical structure to your space. The grooves along the shaft tell a different tale, every time the surrounding light changes. A cone-shape lampshade offers glare-free, intimate, accent light. Extruded is made for exchange. People to people, light to shadow.

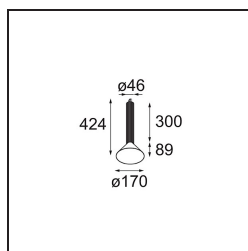

Specifications


| | |
|-------------------------------------|----------------------------------|
| Material | 13520221 |
| Light Source Type | LED |
| LED Type | BRIDGELUX WARMDIM 6W |
| LED technology | LED COB |
| CRI | Min. 95 |
| Colour Temperature | 1800-3000K (Warm Dim) |
| Lifetime | L80B10 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 1 |
| CIE flux code | 98 100 100 100 77 |
| Binning (SDCM) | 3 |
| Light Direction | Down |
| Optic | Reflector |
| Measured beam angle (°) | 45.6 |
| Input Voltage | Constant Current Driver Required |
| Electrical Class | III |
| IP Rating | 20 |
| Glow wire rating (°C) | 960 |
| Indoor/Outdoor | Indoor |
| Application | Ceiling |
| Mounting | Suspended |
| Adjustability | Not Applicable |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | Black, Anodised |
| Secondary Colour & Secondary Finish | Bronze, Brushed Anodised |
| Gross weight (g) | 1160.0 |
| Drive current (mA) | 350 |
| Min. forward voltage (Vf) | 15,5 |
| Max. forward voltage (Vf) | 18,5 |
| Connected load (W) | 6,0 |
| Luminous flux per lamp (lm) | 389 |
| Efficacy (lm/W) | 65 |
| Glare rating | 22 |

| | |
|--------|--|
| Remark | <ul style="list-style-type: none">• Suspension kit not included• Suspension kit not included• Longer suspension cable on request (standard length is 2 meter)• When used in combination with Kompas Round Surface: Suspension Point for Kompas required.• This is not a complete product. Suspension kit required. |
|--------|--|

TM30 & CRI diagram



Light distribution & beam diagram

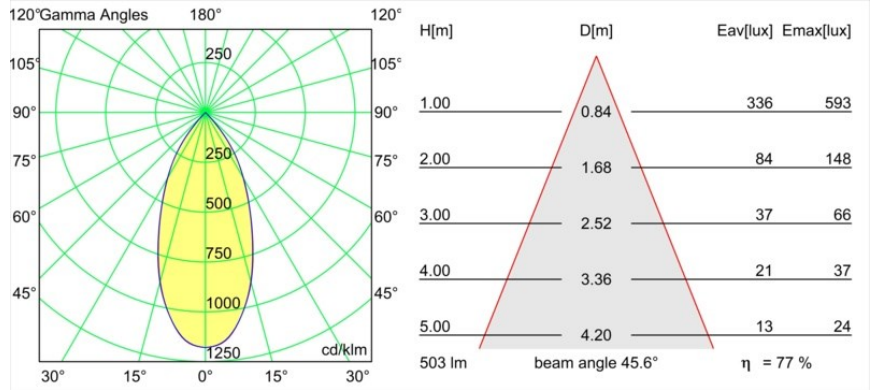

Installation Accessories



■ **13523632** Power Feed and Suspension Canopy Surface Round Extruded Trailing Edge DI 350mA (Incl. Suspension Cable 2000) Black Structure

■ **13523636** Power Feed and Suspension Canopy Surface Round Extruded Trailing Edge DI 350mA (Incl. Suspension Cable 2000) Grey White Matt



■ **13523032** Power Feed and Suspension Canopy Semi-Recessed Round 2P Extruded DE (Incl. Suspension Cable 2000) Black Structure

■ **13523036** Power Feed and Suspension Canopy Semi-Recessed Round 2P Extruded DE (Incl. Suspension Cable 2000) Grey White Matt



■ **13523132** Power Feed and Suspension Canopy Surface Round 2P Extruded DE (Incl. Suspension Cable 2000) Black Structure

■ **13523136** Power Feed and Suspension Canopy Surface Round 2P Extruded DE (Incl. Suspension Cable 2000) Grey White Structure



■ **13523736** Suspension Point Extruded Kompas (Incl. Suspension Cable 2000) Grey White Matt

■ **13523732** Suspension Point Extruded Kompas (Incl. Suspension Cable 2000) Black Structure

13570632 Kompas Round Surface 340 DE Black Structure

13571209 Kompas Round Surface 340 50W 1-10V DI 500mA White Structure

13571232 Kompas Round Surface 340 50W 1-10V DI 500mA Black Structure

13571309 Kompas Round Surface 340 50W DALI DI 500mA White Structure

13571332 Kompas Round Surface 340 50W DALI DI 500mA Black Structure

13571409 Kompas Round Surface 340 100W Casambi DI 350mA White Structure

13571432 Kompas Round Surface 340 100W Casambi DI 350mA Black Structure

| | |
|-----------------|---|
| 13571509 | Kompas Round Surface 340 100W Casambi DI 500mA White Structure |
| 13571532 | Kompas Round Surface 340 100W Casambi DI 500mA Black Structure |
| 13571609 | Kompas Round Surface 340 50W Casambi DI 350mA White Structure |
| 13571632 | Kompas Round Surface 340 50W Casambi DI 350mA Black Structure |
| 13571709 | Kompas Round Surface 340 50W Casambi DI 500mA White Structure |
| 13571732 | Kompas Round Surface 340 50W Casambi DI 500mA Black Structure |
| 13570009 | Kompas Round Surface 340 60W Trailing Edge DI 350mA White Structure |
| 13570032 | Kompas Round Surface 340 60W Trailing Edge DI 350mA Black Structure |
| 13570132 | Kompas Round Surface 340 100W 1-10V DI 350mA Black Structure |
| 13570209 | Kompas Round Surface 340 100W DALI DI 350mA White Structure |
| 13570232 | Kompas Round Surface 340 100W DALI DI 350mA Black Structure |
| 13570309 | Kompas Round Surface 340 60W Trailing Edge DI 500mA White Structure |
| 13570332 | Kompas Round Surface 340 60W Trailing Edge DI 500mA Black Structure |
| 13570409 | Kompas Round Surface 340 100W 1-10V DI 500mA White Structure |
| 13570432 | Kompas Round Surface 340 100W 1-10V DI 500mA Black Structure |
| 13570509 | Kompas Round Surface 340 100W DALI DI 500mA White Structure |
| 13570532 | Kompas Round Surface 340 100W DALI DI 500mA Black Structure |
| 13570609 | Kompas Round Surface 340 DE White Structure |
| 13570809 | Kompas Round Surface 340 30W Trailing Edge DI 350mA White Structure |
| 13570832 | Kompas Round Surface 340 30W Trailing Edge DI 350mA Black Structure |
| 13570909 | Kompas Round Surface 340 50W 1-10V DI 350mA White Structure |
| 13570932 | Kompas Round Surface 340 50W 1-10V DI 350mA Black Structure |
| 13571009 | Kompas Round Surface 340 50W DALI DI 350mA White Structure |
| 13571032 | Kompas Round Surface 340 50W DALI DI 350mA Black Structure |
| 13571109 | Kompas Round Surface 340 30W Trailing Edge DI 500mA White Structure |
| 13571132 | Kompas Round Surface 340 30W Trailing Edge DI 500mA Black Structure |
| 13570109 | Kompas Round Surface 340 100W 1-10V DI 350mA White Structure |

Choose a required accessory