MODULAR LIGHTING — INSTRUMENTS

Date	
Customer	
Project	
Type	

Extruded Suspended 46 900 1x LED 3000K Flood DE Champagne Anodised - Black Brushed Anodised

Esta distinguida luminaria juega con la luz tanto cuando está encendida como cuando está apagada. Sus líneas bien definidas integran estructura vertical en su espacio. Las ranuras a lo largo del eje producen un efecto distinto cada vez que cambia la luz circundante. La pantalla en forma de cono ofrece luz de resalte íntima y sin brillo. Extruded está hecha para el intercambio. De persona a persona, de luz a sombra.



Specifications

Material	13520731	
Tipo de fuente de luz	LED	
Tipo de LED	BRIDGELUX V6 HD G8	
Tecnología LED	COB LED	
CRI	Min. 90	
Temperatura del color	3000K	
Vida Util	L80B10 @50.000 horas	
Lámpara Incluida	Sí	
Número de fuentes de luz	1	
Código de flujo CIE	100 100 100 100 69	
Binning (SDCM)	2	
Dirección de la luz	Directo	
Óptica	Reflector	
Ángulo de Apertura medido (°)	41,9	
Voltaje de entrada	Driver de corriente constante requerido	
Clasificacion eléctrica	III	
Clasificación del IP	20	
Clasificación de hilo incandescente (°C)	960	
Interio/Exterior	Interior	
Aplicación	Techo	
Montaje	Suspendido	
Ajustabilidad	Not Applicable	
Distancia al objeto iluminado (m)	0,1	
Color principal & Acabado principal	Champán, Anodizado	
Color secundario & Acabado secundario	Negro, Anodizado cepillado	
Peso bruto (g)	2365,0	
Corriente de accionamiento (mA)	350	500
Min. forward voltage (Vf)	15,4	15,8
Max. forward voltage (Vf)	18,8	19,4
Connected load (W)	6,0	8,8
Flujo luminoso por lámpara (lm)	504	679
Eficacia (lm/W)	88	80

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-27, 09:11:32 AM - ©Modular Lighting Instruments

Índice de deslumbramiento	21 22
Remark	• Kit de suspensión no incluido • Kit de suspensión no incluido • Cable de suspensión más largo bajo pedido (la longitud estándar es de 2 metros) • Cuando se utiliza en combinación con Kompas Round Surface: Se requiere punto de suspensión para Kompas. • No es un producto completo. Se requiere kit de suspensión.

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-27, 09:11:32 AM - ©Modular Lighting Instruments

TM30 & CRI diagram

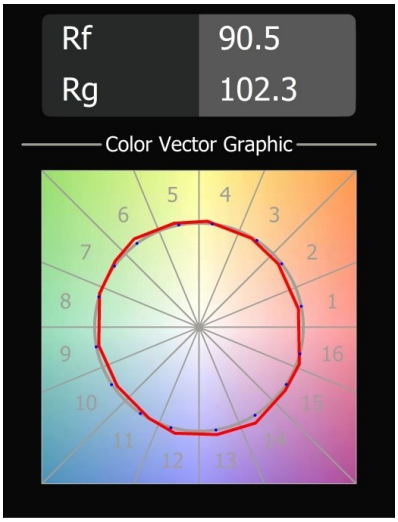

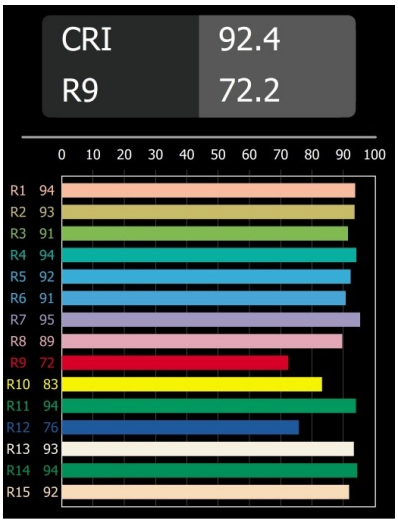

Light distribution & beam diagram

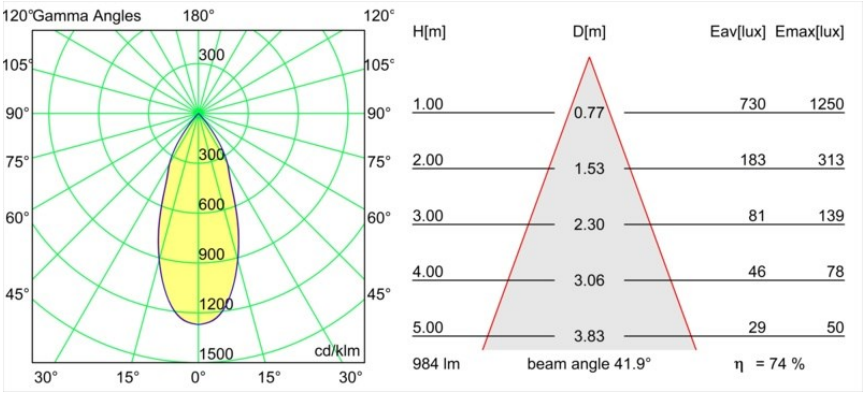

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-27, 09:11:32 AM - ©Modular Lighting Instruments

Accesorios Instalación



13523032 Power Feed and Suspension Canopy Semi-Recessed Round 2P Extruded DE (Incl. Suspension Cable 2000) Black Structure
13523036 Power Feed and Suspension Canopy Semi-Recessed Round 2P Extruded DE (Incl. Suspension Cable 2000) Grey White Matt



13523132 Power Feed and Suspension Canopy Surface Round 2P Extruded DE (Incl. Suspension Cable 2000) Black Structure
13523136 Power Feed and Suspension Canopy Surface Round 2P Extruded DE (Incl. Suspension Cable 2000) Grey White Structure



13523232 Power Feed and Suspension Canopy Surface Round Extruded Trailing Edge DI 500mA (Incl. Suspension Cable 2000) Black Structure
13523236 Power Feed and Suspension Canopy Surface Round Extruded Trailing Edge DI 500mA (Incl. Suspension Cable 2000) Grey White Matt
13523332 Power Feed and Suspension Canopy Surface Round Extruded 1-10V DI (Incl. Suspension Cable 2000) Black Structure
13523336 Power Feed and Suspension Canopy Surface Round Extruded 1-10V DI (Incl. Suspension Cable 2000) Grey White Matt
13523432 Power Feed and Suspension Canopy Surface Round Extruded DALI DI (Incl. Suspension Cable 2000) Black Structure
13523436 Power Feed and Suspension Canopy Surface Round Extruded DALI DI (Incl. Suspension Cable 2000) Grey White Matt
13523532 Power Feed and Suspension Canopy Surface Round Extruded Casambi DI (Incl. Suspension Cable 2000) Black Structure
13523536 Power Feed and Suspension Canopy Surface Round Extruded Casambi DI (Incl. Suspension Cable 2000) Grey White Matt



13523736 Suspension Point Extruded Kompas (Incl. Suspension Cable 2000) Grey White Matt
13523732 Suspension Point Extruded Kompas (Incl. Suspension Cable 2000) Black Structure

13570632 Kompas Round Surface 340 DE Black Structure

13571209 Kompas Round Surface 340 50W 1-10V DI 500mA White Structure

13571232 Kompas Round Surface 340 50W 1-10V DI 500mA Black Structure

13571309 Kompas Round Surface 340 50W DALI DI 500mA White Structure

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-27, 09:11:32 AM - ©Modular Lighting Instruments

13571332 Kompas Round Surface 340 50W DALI DI 500mA Black Structure

13571409 Kompas Round Surface 340 100W Casambi DI 350mA White Structure

13571432 Kompas Round Surface 340 100W Casambi DI 350mA Black Structure

13571509 Kompas Round Surface 340 100W Casambi DI 500mA White Structure

13571532 Kompas Round Surface 340 100W Casambi DI 500mA Black Structure

13571609 Kompas Round Surface 340 50W Casambi DI 350mA White Structure

13571632 Kompas Round Surface 340 50W Casambi DI 350mA Black Structure

13571709 Kompas Round Surface 340 50W Casambi DI 500mA White Structure

13571732 Kompas Round Surface 340 50W Casambi DI 500mA Black Structure

13570009 Kompas Round Surface 340 60W Trailing Edge DI 350mA White Structure

13570032 Kompas Round Surface 340 60W Trailing Edge DI 350mA Black Structure

13570132 Kompas Round Surface 340 100W 1-10V DI 350mA Black Structure

13570209 Kompas Round Surface 340 100W DALI DI 350mA White Structure

13570232 Kompas Round Surface 340 100W DALI DI 350mA Black Structure

13570309 Kompas Round Surface 340 60W Trailing Edge DI 500mA White Structure

13570332 Kompas Round Surface 340 60W Trailing Edge DI 500mA Black Structure

13570409 Kompas Round Surface 340 100W 1-10V DI 500mA White Structure

13570432 Kompas Round Surface 340 100W 1-10V DI 500mA Black Structure

13570509 Kompas Round Surface 340 100W DALI DI 500mA White Structure

13570532 Kompas Round Surface 340 100W DALI DI 500mA Black Structure

13570609 Kompas Round Surface 340 DE White Structure

13570809 Kompas Round Surface 340 30W Trailing Edge DI 350mA White Structure

13570832 Kompas Round Surface 340 30W Trailing Edge DI 350mA Black Structure

13570909 Kompas Round Surface 340 50W 1-10V DI 350mA White Structure

13570932 Kompas Round Surface 340 50W 1-10V DI 350mA Black Structure

13571009 Kompas Round Surface 340 50W DALI DI 350mA White Structure

13571032 Kompas Round Surface 340 50W DALI DI 350mA Black Structure

13571109 Kompas Round Surface 340 30W Trailing Edge DI 500mA White Structure

13571132 Kompas Round Surface 340 30W Trailing Edge DI 500mA Black Structure

13570109 Kompas Round Surface 340 100W 1-10V DI 350mA White Structure

Choose a required accessory

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-09-27, 09:11:32 AM - ©Modular Lighting Instruments