


Date
Customer
Project
Type

Extruded Suspended 46 900 1x LED 3000K Flood DE Champagne Anodised - Champagne Brushed Anodised



This statement luminaire loves to play with light when it's on and when it's off. Its strong lines bring vertical structure to your space. The grooves along the shaft tell a different tale, every time the surrounding light changes. A cone-shape lampshade offers glare-free, intimate, accent light. Extruded is made for exchange. People to people, light to shadow.





Specifications


Material	13520734	
Light Source Type	LED	
LED Type	BRIDGELUX V6 HD G8	
LED technology	LED COB	
CRI	Min. 90	
Colour Temperature	3000K	
Lifetime	L80B10 @50,000 Hours	
Lamp Included	Yes	
Number of Light Sources	1	
CIE flux code	99 100 100 100 72	
Binning (SDCM)	2	
Light Direction	Down	
Optic	Reflector	
Measured beam angle (°)	41.9	
Input Voltage	Constant Current Driver Required	
Electrical Class	III	
IP Rating	20	
Glow wire rating (°C)	960	
Indoor/Outdoor	Indoor	
Application	Ceiling	
Mounting	Suspended	
Adjustability	Not Applicable	
Distance to Lighted Object (m)	0,1	
Primary Colour & Primary Finish	Champagne, Anodised	
Secondary Colour & Secondary Finish	Champagne, Brushed Anodised	
Gross weight (g)	2365.0	
Drive current (mA)	350	500
Min. forward voltage (Vf)	15,4	15,8
Max. forward voltage (Vf)	18,8	19,4
Connected load (W)	6,0	8,8
Luminous flux per lamp (lm)	524	707
Efficacy (lm/W)	92	83
Glare rating	22	23
Remark	• Suspension kit not included	

- Suspension kit not included
 - Longer suspension cable on request (standard length is 2 meter)
 - When used in combination with Kompas Round Surface: Suspension Point for Kompas required.
 - This is not a complete product. Suspension kit required.
-


TM30 & CRI diagram

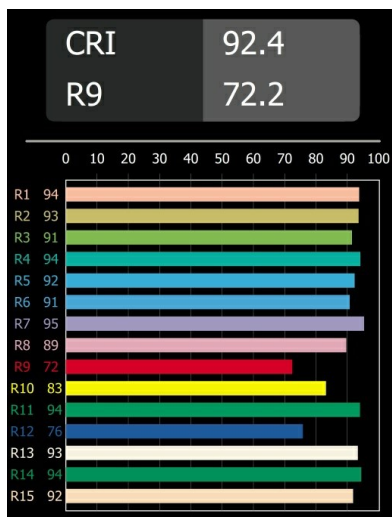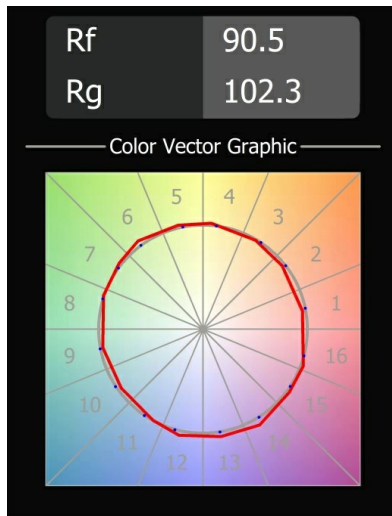


Light distribution & beam diagram

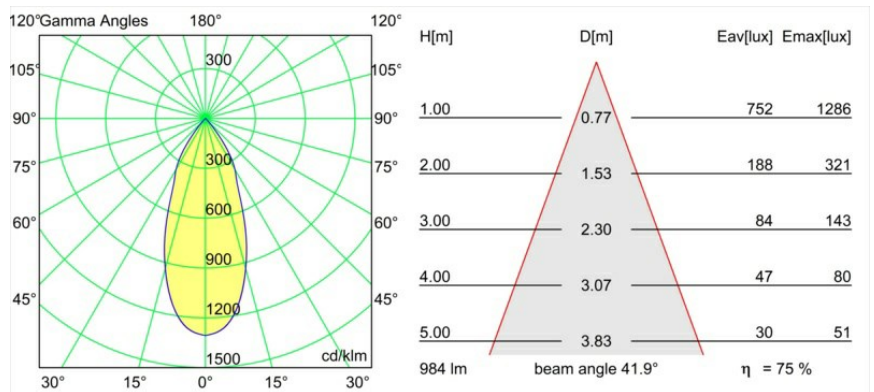


Installation Accessories



- **13523032** Power Feed and Suspension Canopy Semi-Recessed Round 2P Extruded DE (Incl. Suspension Cable 2000) Black Structure
- **13523036** Power Feed and Suspension Canopy Semi-Recessed Round 2P Extruded DE (Incl. Suspension Cable 2000) Grey White Matt



- **13523132** Power Feed and Suspension Canopy Surface Round 2P Extruded DE (Incl. Suspension Cable 2000) Black Structure
- **13523136** Power Feed and Suspension Canopy Surface Round 2P Extruded DE (Incl. Suspension Cable 2000) Grey White Structure



- **13523232** Power Feed and Suspension Canopy Surface Round Extruded Trailing Edge DI 500mA (Incl. Suspension Cable 2000) Black Structure
- **13523236** Power Feed and Suspension Canopy Surface Round Extruded Trailing Edge DI 500mA (Incl. Suspension Cable 2000) Grey White Matt
- **13523332** Power Feed and Suspension Canopy Surface Round Extruded 1-10V DI (Incl. Suspension Cable 2000) Black Structure
- **13523336** Power Feed and Suspension Canopy Surface Round Extruded 1-10V DI (Incl. Suspension Cable 2000) Grey White Matt
- **13523432** Power Feed and Suspension Canopy Surface Round Extruded DALI DI (Incl. Suspension Cable 2000) Black Structure
- **13523436** Power Feed and Suspension Canopy Surface Round Extruded DALI DI (Incl. Suspension Cable 2000) Grey White Matt
- **13523532** Power Feed and Suspension Canopy Surface Round Extruded Casambi DI (Incl. Suspension Cable 2000) Black Structure
- **13523536** Power Feed and Suspension Canopy Surface Round Extruded Casambi DI (Incl. Suspension Cable 2000) Grey White Matt

■ Choose a required accessory