


Date
Customer
Project
Type

Kogel Surface Adjustable 58 1x LED 2700K Trailing Edge DI Black Structure





Specifications


Material	13560332
Light Source Type	LED
LED Type	BRIDGELUX V6 HD G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	98 100 100 100 66
Binning (SDCM)	2
Light Direction	Down
Input Voltage	230V
Luminaire power (W)	10.4
Electrical Class	I
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	Trailing Edge
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Surface
Adjustability	H 360° V 50°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	1414.0
Delivered lumens (lm)	651
Efficacy (lm/W)	63
Glare rating	20
Remark	<ul style="list-style-type: none"> • Magnetic reflector or lens not included. • This is not a complete product. Magnetic reflector or lens required. • This is not a complete product. Magnetic reflector or lens required.

A spotlight with extremely flexible rotation, Kogel will leave you gasping in wonder. For starters, it uses a ball joint as a rotation mechanism. So yes, turning it all kinds of ways is possible. And no, the wires won't get all twisted inside. It just works and you'll love it on ceilings and walls. Designed by Odin and Jaap of Studio Kees, Kogel is truly a light that gives pleasure.


TM30 & CRI diagram

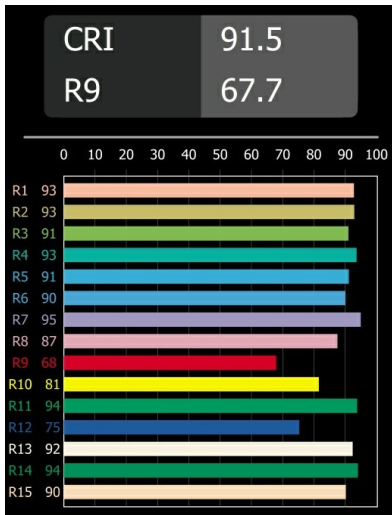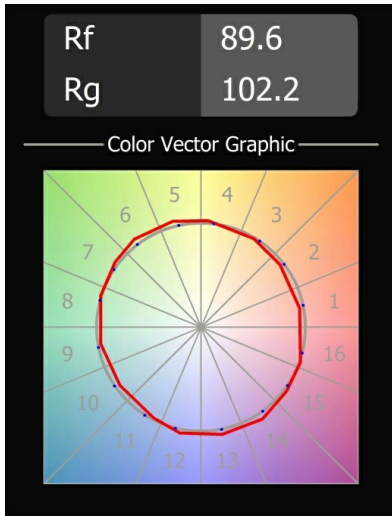

Optical Accessories



- **10222630** Lens 51 Spot
- **10222730** Lens 51 Medium
- **10222830** Lens 51 Flood
- **10222930** Lens 51 Wide Flood



- **10219930** Reflector 51 Spot Aluminium Anodised
- **10220030** Reflector 51 Medium Aluminium Anodised
- **10220130** Reflector 51 Flood Aluminium Anodised

■ Choose a required accessory