


Date
Customer
Project
Type

Gamin Track 48V 90 lx LED 1800-3000K WD DALI Black Structure




Bring harmony and happiness to your space. Explore endless planetary configurations for your concept with our spherical luminaire, Gamin, and enjoy its soft, diffuse light. Unify your expression while keeping it unique, with variants of Placebo and/or Shelby.

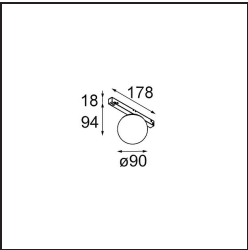

Specifications

Material	13600532
Light Source Type	LED
LED Type	BRIDGELUX WARMDIM 6W
LED technology	LED COB
CRI	Min. 95
Colour Temperature	1800-3000K (Warm Dim)
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	24 49 75 61 71
Binning (SDCM)	3
Light Direction	Down
Input Voltage	48Vdc
Luminaire power (W)	6.6
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI
DALI Standard	DALI-2
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	422.0
Luminous flux per lamp (lm)	358
Efficacy (lm/W)	54
Glare rating	21
Remark	<ul style="list-style-type: none"> <li>This is not a complete product. Pista track 48V system required.</li> <li>For installations without dimmer, it is recommended to use 1-10 V luminaires.</li> </ul>

TM30 &amp; CRI diagram

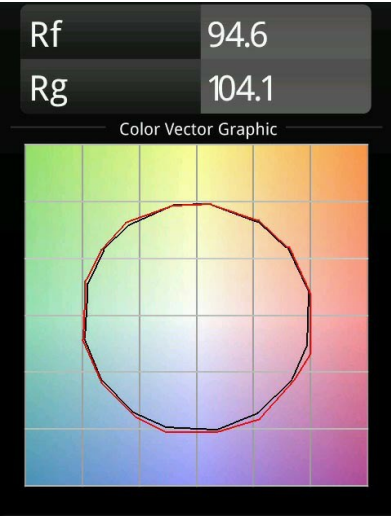

Light distribution &amp; beam diagram

