


Date
Customer
Project
Type

Rektor Semi-Recessed Adjustable 57x50 1x LED 1800-3000K WD Medium DE Black Structure

With a name derived from the Latin word for “ruler”, the Rektor family has all the qualities of a leader. Strong, guiding, and arguably a good listener. Winner of the 2014 Henry Van de Velde design award, Rektor is an orientable downlighter that showcases the distinguished effects of right angles and accented light direction.

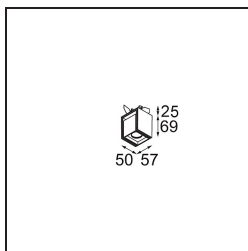


Specifications

Material	13610432
Light Source Type	LED
LED Type	BRIDGELUX WARMDIM 6W
LED technology	LED COB
CRI	Min. 95
Colour Temperature	1800-3000K (Warm Dim)
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	93 99 100 100 73
Binning (SDCM)	3
Light Direction	Down
Optic	Reflector
Measured beam angle (°)	36.8
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Semi-Recessed
Cut-out size (mm)	ø40
Mounting depth (mm)	70.0
Adjustability	H 365° V -110°/+110°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	283.0
Drive current (mA)	350
Min. forward voltage (Vf)	15,5
Max. forward voltage (Vf)	18,5
Connected load (W)	6,0
Luminous flux per lamp (lm)	368
Efficacy (lm/W)	61
Glare rating	22

TM30 & CRI diagram



Light distribution & beam diagram

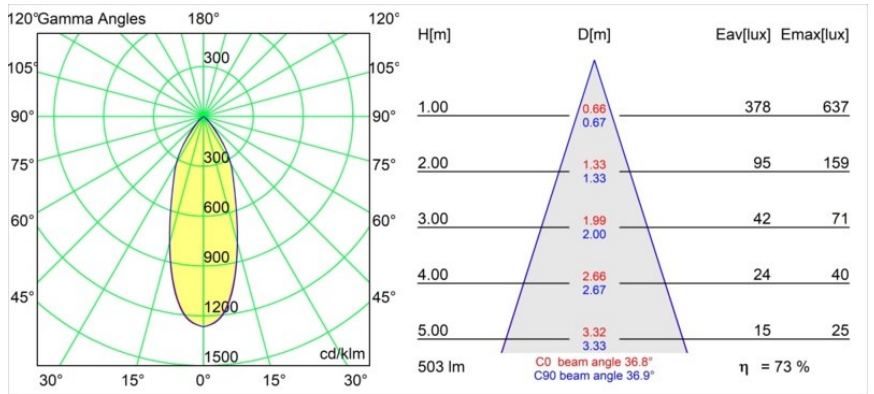

Optical Accessories



14192032 Snoot 26 Black Matt




14193032 Crossblade 26 Black Matt




14191032 Honeycomb 26 Black Matt

Installation Accessories

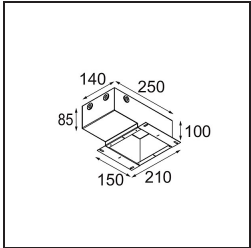

11624030 Installation Housing 140x250x100x210

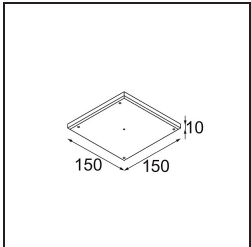

12292630 Gypsum Fibreboard 150x150

Choose a required accessory