

Rektor Track 48V Adjustable 57x50 2x LED 2700K Medium 1-10V Black Structure

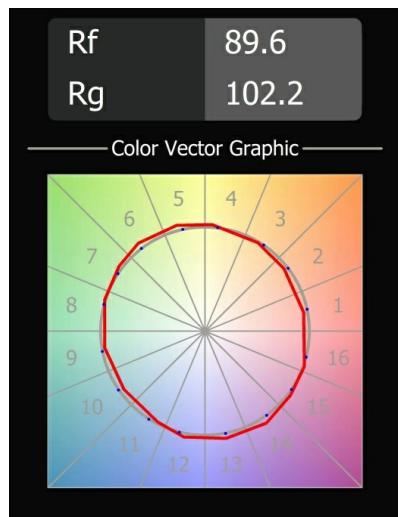
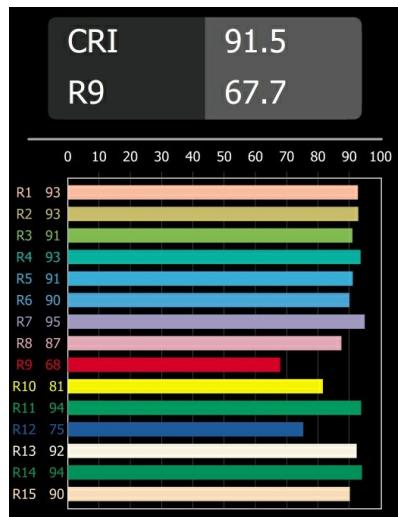
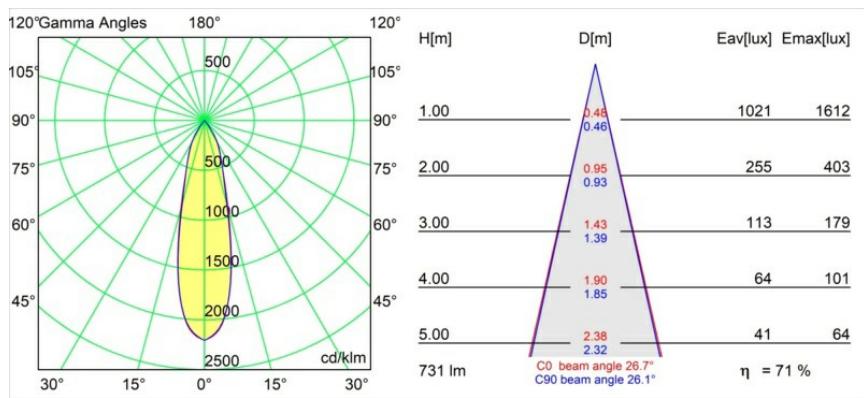


With a name derived from the Latin word for “ruler”, the Rektor family has all the qualities of a leader. Strong, guiding, and arguably a good listener. Winner of the 2014 Henry Van de Velde design award, Rektor is an orientable downlighter that showcases the distinguished effects of right angles and accented light direction.




Specifications


| | |
|---------------------------------|---|
| Material | 13621432 |
| Light Source Type | LED |
| LED Type | BRIDGELUX V6 HD G8 |
| LED technology | LED COB |
| CRI | Min. 90 |
| Colour Temperature | 2700K |
| Lifetime | L90B10 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 2 |
| CIE flux code | 98 99 100 100 72 |
| Binning (SDCM) | 2 |
| Light Direction | Down |
| Optic | Reflector |
| Measured beam angle (°) | 26.7 |
| Input Voltage | 48Vdc |
| Luminaire power (W) | 13.0 |
| Electrical Class | III |
| IP Rating | 20 |
| Glow wire rating (°C) | 960 |
| Dimming Protocol | 1-10V |
| Indoor/Outdoor | Indoor |
| Application | Ceiling, Wall |
| Adjustability | H 365° V -110°/+110° |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | Black, Structure |
| Gross weight (g) | 660.0 |
| Luminous flux per lamp (lm) | 526 |
| Efficacy (lm/W) | 67 |
| Glare rating | 20 |
| Remark | <ul style="list-style-type: none"> • This is not a complete product. Pista track 48V system required. • For installations without dimmer, it is recommended to use 1-10 V luminaires. |

TM30 & CRI diagram

Light distribution & beam diagram



Optical Accessories



14191032 Honeycomb 26 Black Matt



14192032 Snoot 26 Black Matt



14193032 Crossblade 26 Black Matt

Choose a required accessory