


Date
Customer
Project
Type

## *Rektor Track 48V Adjustable 57x50 2x LED 1800-3000K WD Medium DALI Black Structure*




With a name derived from the Latin word for “ruler”, the Rektor family has all the qualities of a leader. Strong, guiding, and arguably a good listener. Winner of the 2014 Henry Van de Velde design award, Rektor is an orientable downlighter that showcases the distinguished effects of right angles and accented light direction.

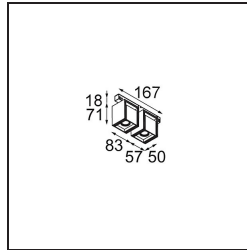


### **Specifications**

Material	13622332
Light Source Type	LED
LED Type	BRIDGELUX WARMDIM 6W
LED technology	LED COB
CRI	Min. 95
Colour Temperature	1800-3000K (Warm Dim)
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	2
CIE flux code	93 99 100 100 73
Binning (SDCM)	3
Light Direction	Down
Optic	Reflector
Measured beam angle (°)	36.8
Input Voltage	48Vdc
Luminaire power (W)	13.0
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	DALI
DALI Standard	DALI-2
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Adjustability	H 365° V -110°/+110°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	660.0
Luminous flux per lamp (lm)	368
Efficacy (lm/W)	53
Glare rating	22
Remark	<ul style="list-style-type: none"> <li>• This is not a complete product. Pista track 48V system required.</li> <li>• For installations without dimmer, it is recommended to use 1-10 V luminaires.</li> </ul>

TM30 &amp; CRI diagram

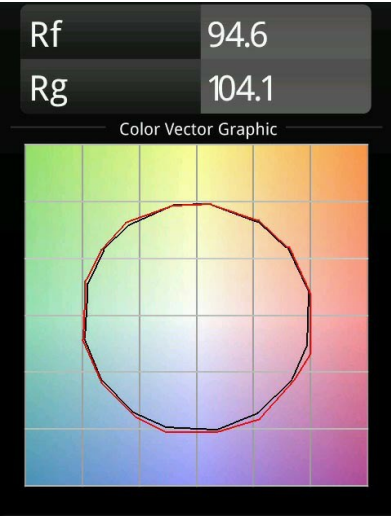


Light distribution &amp; beam diagram

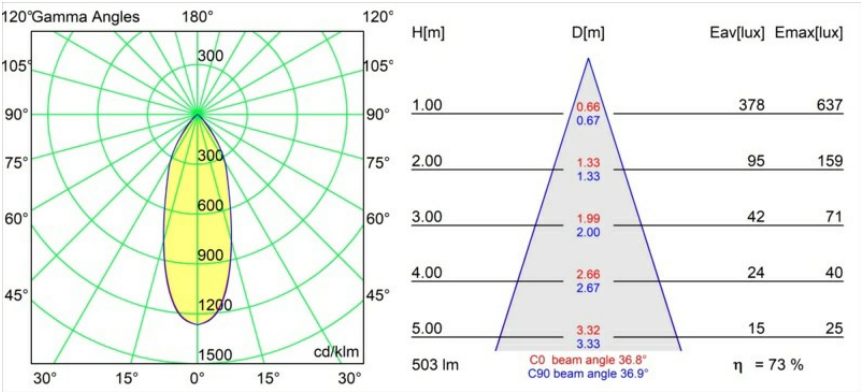


Diagrams


### Optical Accessories



**14191032** Honeycomb 26 Black Matt



**14192032** Snoot 26 Black Matt

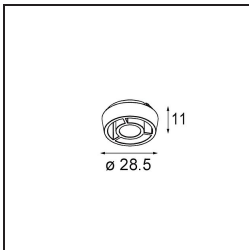

**14193032** Crossblade 26 Black Matt

Choose a required accessory