
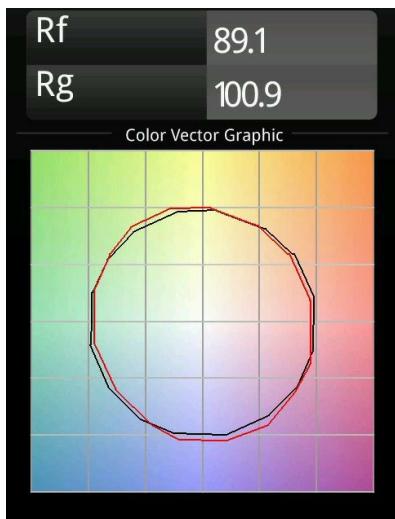



Minude Recessed 56 1x IP54 LED 2700K Medium DE Silver Bronze Brushed Anodised

Specifications


| | | |
|---------------------------------|----------------------------------|------|
| Material | 13650084 | |
| Light Source Type | LED | |
| LED Type | BRIDGELUX V6 HD G7 | |
| LED technology | LED COB | |
| CRI | Min. 90 | |
| Colour Temperature | 2700K | |
| Lifetime | L80B10 @50,000 Hours | |
| Lamp Included | Yes | |
| Number of Light Sources | 1 | |
| CIE flux code | 100 100 100 100 62 | |
| Binning (SDCM) | 2 | |
| Light Direction | Down | |
| Optic | Lens | |
| Measured beam angle (°) | 29.0 | |
| Input Voltage | Constant Current Driver Required | |
| Electrical Class | III | |
| IP Rating | 54 | |
| Glow wire rating (°C) | 960 | |
| Indoor/Outdoor | Indoor | |
| Application | Ceiling, Wall | |
| Mounting | Recessed | |
| Cut-out size (mm) | Ø51 | |
| Mounting depth (mm) | 100.0 | |
| Adjustability | Not Applicable | |
| Distance to Lighted Object (m) | 0,1 | |
| Primary Colour & Primary Finish | Silver Bronze, Brushed Anodised | |
| Gross weight (g) | 190.0 | |
| Drive current (mA) | 350 | 500 |
| Min. forward voltage (Vf) | 14.8 | 15.2 |
| Max. forward voltage (Vf) | 18.0 | 18.6 |
| Connected load (W) | 5.7 | 8.5 |
| Luminous flux per lamp (lm) | 446 | 602 |
| Efficacy (lm/W) | 78 | 71 |
| Glare rating | 3 | 4 |

TM30 & CRI diagram

Light distribution & beam diagram



Installation Accessories



12293830 Plaster Kit 51 1x



11624030 Installation Housing 140x250x100x210



12292630 Gypsum Fibreboard 150x150

Choose a required accessory