


Date
Customer
Project
уре

K 72 Recessed 72 1x IP55 LED 2700K Flood DE Black Structure



Every project needs a spotlight for general lighting. K is our suggestion for those who like to keep things simple yet flexible. K comes in two sizes, 80 and 89 mm, with a flat or sloping edge, in aluminium, or with a white or black structure. Available with halogen and LED. Choose the directional model for a greater interplay of light and more versatility.





Specifications			
Material	14040232		
Light Source Type	LED		
LED Type	BRIDGELUX V8G8		
LED technology	LED COB		
CRI	Min. 90		
Colour Temperature	2700K		
Lifetime	L90B10 @50,000 Hours		
Lamp Included	Yes		
Number of Light Sources	1		
CIE flux code	95 100 100 100 90		
Binning (SDCM)	2		
Light Direction	Down		
Optic	Reflector		
Measured beam angle (°)	32.0		
Input Voltage	Constant Current Driver Required		
Electrical Class	III		
IP Rating	55		
Glow wire rating (°C)	960		
Indoor/Outdoor	Indoor		
Application	Ceiling, Wall		
Mounting	Recessed		
Cut-out size (mm)	ø65		
Mounting depth (mm)	60.0		
Adjustability	Not Applicable		
Distance to Lighted Object (m)	0,1		
Primary Colour & Primary Finish	Black, Structure		
Gross weight (g)	189.0		
Drive current (mA)	350	500	
Min. forward voltage (Vf)	13,2	13,7	
Max. forward voltage (Vf)	15,0	15,4	
Connected load (W)	5,0	7,2	
Luminous flux per lamp (lm)	497	668	
Efficacy (Im/W)	99	93	
01 "	0	0.4	

20

21

Glare rating




TM30 & CRI diagram






Light distribution & beam diagram

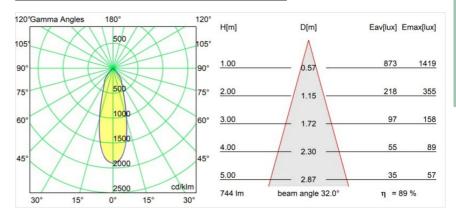




Decorative Accessories




14042009 K-Set 72 1x White Structure **14042032** K-Set 72 1x Black Structure




14042109 K-Set 72 2x White Structure K-Set 72 2x Black Structure

Installation Accessories



10490330 Installation Housing 172x112x100



12291330 Plaster Kit 170x112 - 65 1x

Choose a required accessory