MODULAR LIGHTING — INSTRUMENTS

Date	
Customer	
Project	
Type	

K 72 Recessed 72 1x IP55 LED 3000K Spot DE Black Structure



Ogni progetto ha bisogno di uno spot per l'illuminazione generale. K è il nostro suggerimento per chi ama la semplicità, ma anche la flessibilità. K è disponibile in due diametri da 80 e 89 mm, con bordo piatto o inclinato, in alluminio o con struttura bianca o nera. Disponibile con luce alogena e LED. Scegli il modello direzionale per esaltare il gioco di luci e la versatilità.

Specifications

Materiale	14040332	
Tipo di Sorgente	LED	
Tipologia LED	BRIDGELUX V8G8	
Tecnologie LED	COB	
CRI	Min. 90	
Temperatura di colore della luce	3000K	
Vita utile	L90B10 @50.000 ore	
Lampadina inclusa	Sì	
Numero di fonte luminosa	1	
Codice di flusso CIE	95 100 100 100 89	
Binning (SDCM)	2	
Direzione della luce	Diretta	
Ottiche	Riflettore	
Fascio misurato (°)	15,5	
Volt in ingresso	Necessario driver a corrente costante	
Classificazione elettrica	III	
Grado IP	55	
Test filo a caldo (°C)	960	
Interno/Esterno	Interno	
Applicazione	Soffitto, Parete	
Montaggio	Incassato	
Foro d'incasso (mm)	ø65	
Profondità di montaggio (mm)	60,0	
Orientabilità	Not Applicable	
Distanza dall'oggetto illuminato (m)	0,1	
Colore primario & Finitura primaria	Nero, Strutturata	
Peso lordo (g)	189,0	
Corrente di azionamento (mA)	350	500
Min. forward voltage (Vf)	13,2	13,7
Max. forward voltage (Vf)	15,0	15,4
Connected load (W)	5,0	7,2
Flusso luminoso per lampade (lm)	512	687
Efficienza (lm/W)	102	95

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-04-04, 02:17:14 PM - ©Modular Lighting Instruments

Livello abbagliamento	20	21

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-04-04, 02:17:14 PM - ©Modular Lighting Instruments

TM30 & CRI diagram

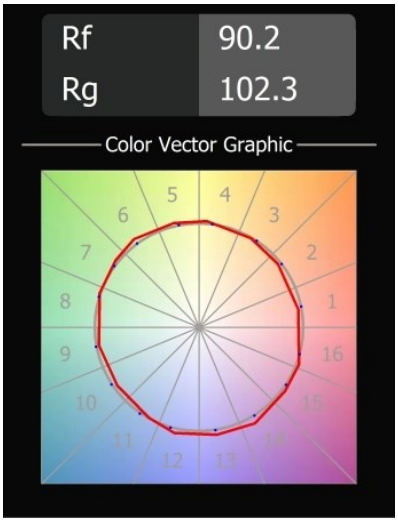

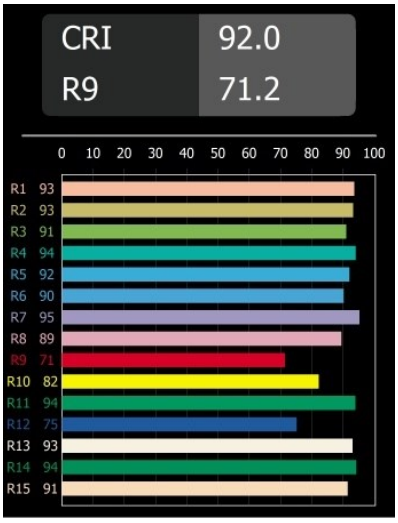

Light distribution & beam diagram

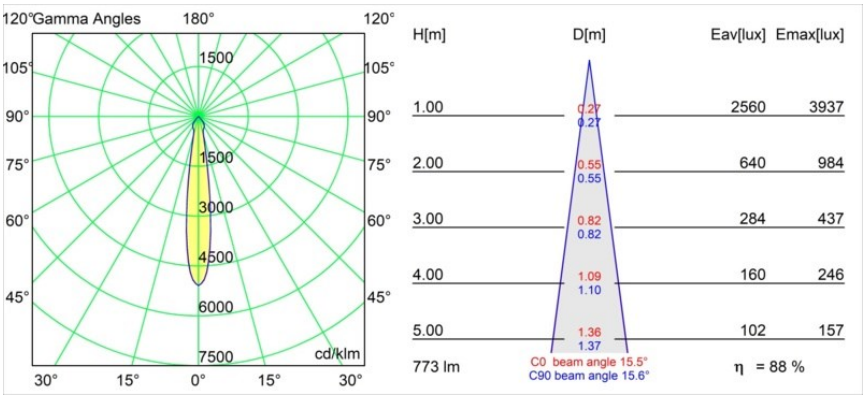

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-04-04, 02:17:14 PM - ©Modular Lighting Instruments

Accessori Decorativi



14042009 K-Set 72 1x White Structure
14042032 K-Set 72 1x Black Structure



14042109 K-Set 72 2x White Structure
14042132 K-Set 72 2x Black Structure

Accessori Installazione



10490330 Installation Housing 172x112x100



12291330 Plaster Kit 170x112 - 65 1x

Choose a required accessory

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2026-04-04, 02:17:14 PM - ©Modular Lighting Instruments