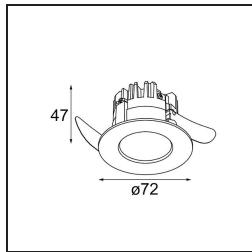




Date _____
Customer _____
Project _____
Type _____

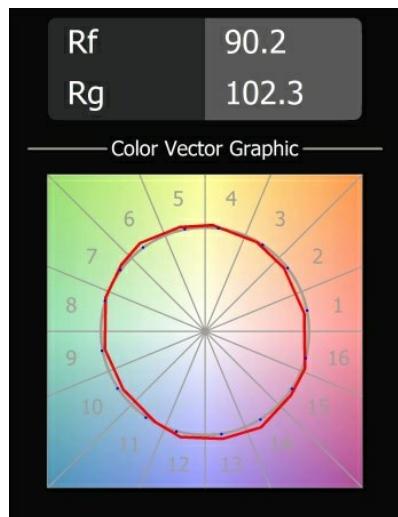
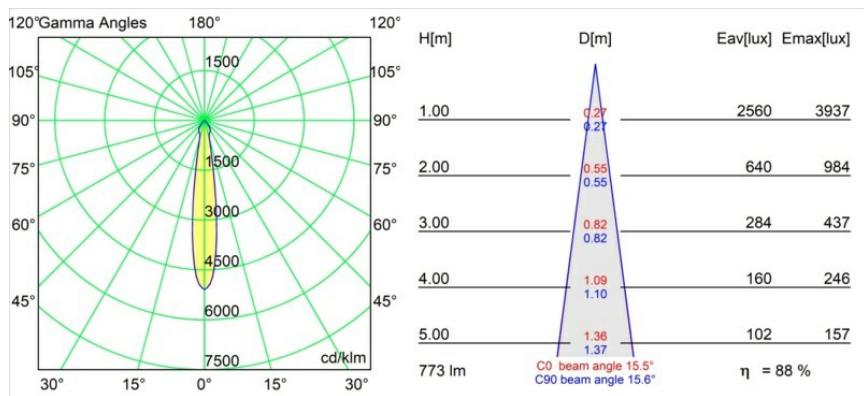
K 72 Recessed 72 lx IP55 LED 3000K Spot Trailing Edge RD Black Structure





Specifications

| | |
|---------------------------------|----------------------|
| Material | 14041332 |
| Light Source Type | LED |
| LED Type | BRIDGELUX V8G8 |
| LED technology | LED COB |
| CRI | Min. 90 |
| Colour Temperature | 3000K |
| Lifetime | L90B10 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 1 |
| CIE flux code | 95 100 100 100 89 |
| Binning (SDCM) | 2 |
| Light Direction | Down |
| Optic | Reflector |
| Measured beam angle (°) | 15.5 |
| Input Voltage | 230V |
| Luminaire power (W) | 9.5 |
| Electrical Class | II |
| IP Rating | 55 |
| Glow wire rating (°C) | 960 |
| Dimming Protocol | Trailing Edge |
| Indoor/Outdoor | Indoor |
| Application | Ceiling, Wall |
| Mounting | Recessed |
| Cut-out size (mm) | Ø65 |
| Mounting depth (mm) | 60.0 |
| Adjustability | Not Applicable |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | Black, Structure |
| Gross weight (g) | 189.0 |
| Luminous flux per lamp (lm) | 687 |
| Efficacy (lm/W) | 72 |
| Glare rating | 21 |



Every project needs a spotlight for general lighting. K is our suggestion for those who like to keep things simple yet flexible. K comes in two sizes, 80 and 89 mm, with a flat or sloping edge, in aluminium, or with a white or black structure. Available with halogen and LED. Choose the directional model for a greater interplay of light and more versatility.

TM30 & CRI diagram

Light distribution & beam diagram


Decorative Accessories

14042009 K-Set 72 1x White Structure

14042032 K-Set 72 1x Black Structure

14042109 K-Set 72 2x White Structure

14042132 K-Set 72 2x Black Structure

Installation Accessories

10490330 Installation Housing 172x112x100

12291330 Plaster Kit 170x112 - 65 1x

Choose a required accessory