


Date	
Customer	
Project	
Гуре	

### K 72 Recessed 72 1x IP55 LED 4000K Medium DE White Structure



Every project needs a spotlight for general lighting. K is our suggestion for those who like to keep things simple yet flexible. K comes in two sizes, 80 and 89 mm, with a flat or sloping edge, in aluminium, or with a white or black structure. Available with halogen and LED. Choose the directional model for a greater interplay of light and more versatility.





Specifications			
Material	14040709		
Light Source Type	LED		
LED Type	BRIDGELUX V8G6		
LED technology	LED COB		
CRI	Min. 90		
Colour Temperature	4000K		
Lifetime	L80B20 @50,000 Hours		
Lamp Included	Yes		
Number of Light Sources	1		
Binning (SDCM)	3		
Light Direction	Down		
Optic	Reflector		
Measured beam angle (°)	22.5		
Input Voltage	Constant C	Current Driver Required	
Electrical Class	III		
IP Rating	55		
Glow wire rating (°C)	960		
Indoor/Outdoor	Indoor		
Application	Ceiling, Wall		
Mounting	Recessed		
Cut-out size (mm)	ø65		
Mounting depth (mm)	60.0		
Adjustability	Not Applicable		
Distance to Lighted Object (m)	0,1		
Primary Colour & Primary Finish	White, Structure		
Gross weight (g)	189.0		
Drive current (mA)	350	500	
Min. forward voltage (Vf)	16,5	17,1	
Max. forward voltage (Vf)	19,2	19,8	
Connected load (W)	6,2	9,2	
Luminous flux per lamp (lm)	582	731	
Efficacy (Im/W)	94	79	
· · · · · · · · · · · · · · · · · · ·	· · · · · · · · · · · · · · · · · · ·		

Glare rating

21

22




# TM30 & CRI diagram






# Light distribution & beam diagram

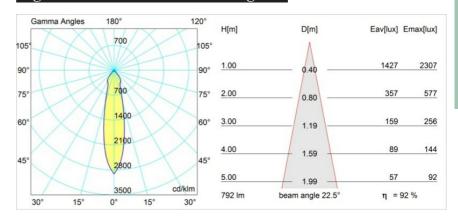




## Decorative Accessories




**14042009** K-Set 72 1x White Structure K-Set 72 1x Black Structure




**14042109** K-Set 72 2x White Structure **K-Set** 72 2x Black Structure

## Installation Accessories



**10490330** Installation Housing 172x112x100



**12291330** Plaster Kit 170x112 - 65 1x

Choose a required accessory