


Date
Customer
Project
Туре

K 77 Recessed Adjustable 77 1x LED 3000K Medium DE White Structure



Every project needs a spotlight for general lighting. K is our suggestion for those who like to keep things simple yet flexible. K comes in two sizes, 80 and 89 mm, with a flat or sloping edge, in aluminium, or with a white or black structure. Available with halogen and LED. Choose the directional model for a greater interplay of light and more versatility.



Specifications

Max. forward voltage (Vf) 15,0

Connected load (W)

Efficacy (Im/W)

Glare rating

(Im)

Luminous flux per lamp



14050400

Material	14050409
Light Source Type	LED
LED Type	BRIDGELUX V8G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L90B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	93 98 99 100 92
Binning (SDCM)	2
Light Direction	Down
Optic	Reflector
Measured beam angle (°)	22.5
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Recessed
Cut-out size (mm)	ø70
Mounting depth (mm)	60.0
Adjustability	H 360° V -30°/+30°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Gross weight (g)	208.0
Drive current (mA)	350 500
Min. forward voltage (Vf)	13,2 13,7
	· · · · · · · · · · · · · · · · · · ·

15,4

7,2 714

99

22

532


106

21




TM30 & CRI diagram






Light distribution & beam diagram

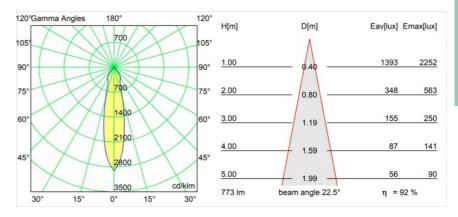




Decorative Accessories




14052009 K-Set 77 1x White Structure **14052032** K-Set 77 1x Black Structure




14052109 K-Set 77 2x White Structure **K-Set** 77 2x Black Structure

Installation Accessories



10889830 Installation Housing 192x190x130



12290130 Plaster Kit 190X190 - 70 1x

Choose a required accessory