


Date
Customer
Project
Type

FFD_K 77 Recessed Adjustable 77 1x LED 2700K Spot Trailing Edge RD Donkey Grey Structure




Every project needs a spotlight for general lighting. K is our suggestion for those who like to keep things simple yet flexible. K comes in two sizes, 80 and 89 mm, with a flat or sloping edge, in aluminium, or with a white or black structure. Available with halogen and LED. Choose the directional model for a greater interplay of light and more versatility.




Specifications

Material	14051071
Light Source Type	LED
LED Type	BRIDGELUX V8G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L90B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	95 100 100 100 89
Binning (SDCM)	2
Light Direction	Down
Optic	Reflector
Measured beam angle (°)	15.5
Input Voltage	230V
Luminaire power (W)	9.5
Electrical Class	II
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	Trailing Edge
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Recessed
Cut-out size (mm)	ø70
Mounting depth (mm)	60.0
Adjustability	H 360° V -30°/+30°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Donkey Grey, Structure
Gross weight (g)	307.0
Luminous flux per lamp (lm)	661
Efficacy (lm/W)	70
Glare rating	21


TM30 & CRI diagram

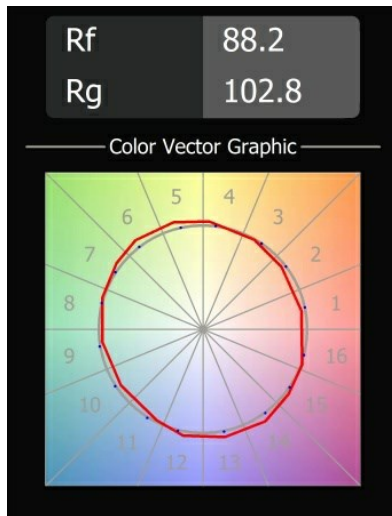

Light distribution & beam diagram

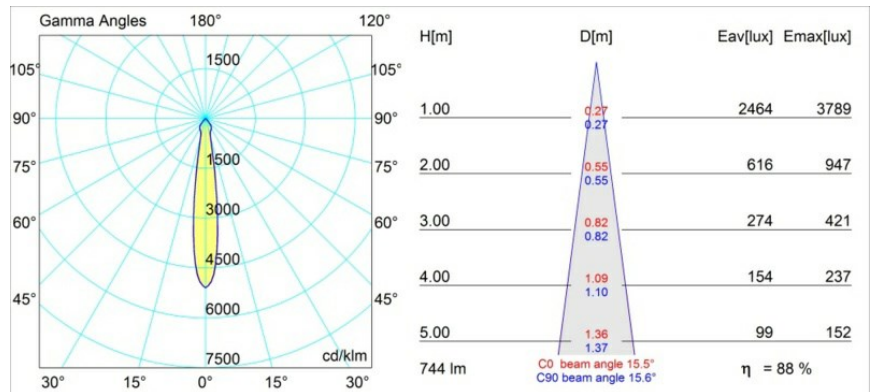


Decorative Accessories



14052009 K-Set 77 1x White Structure


14052032 K-Set 77 1x Black Structure




14052109 K-Set 77 2x White Structure

14052132 K-Set 77 2x Black Structure

Installation Accessories



10889830 Installation Housing 192x190x130



12290130 Plaster Kit 190X190 - 70 1x

Choose a required accessory