

Date
Customer
Project
Type

*K 77 Recessed Adjustable 77 lx LED 2700K Medium Trailing Edge RD Black Structure*



**Specifications**


Material	14051132
Light Source Type	LED
LED Type	BRIDGELUX V8G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L90B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	95 100 100 100 87
Binning (SDCM)	2
Light Direction	Down
Optic	Reflector
Measured beam angle (°)	22.5
Input Voltage	230V
Luminaire power (W)	9.5
Electrical Class	II
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	Trailing Edge
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Mounting	Recessed
Cut-out size (mm)	ø70
Mounting depth (mm)	60.0
Adjustability	H 360° V -30°/+30°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	208.0
Luminous flux per lamp (lm)	648
Efficacy (lm/W)	68
Glare rating	21

Every project needs a spotlight for general lighting. K is our suggestion for those who like to keep things simple yet flexible. K comes in two sizes, 80ø and 89ø mm, with a flat or sloping edge, in aluminium, or with a white or black structure. Available with halogen and LED. Choose the directional model for a greater interplay of light and more versatility.

**TM30 & CRI diagram**




**Light distribution & beam diagram**

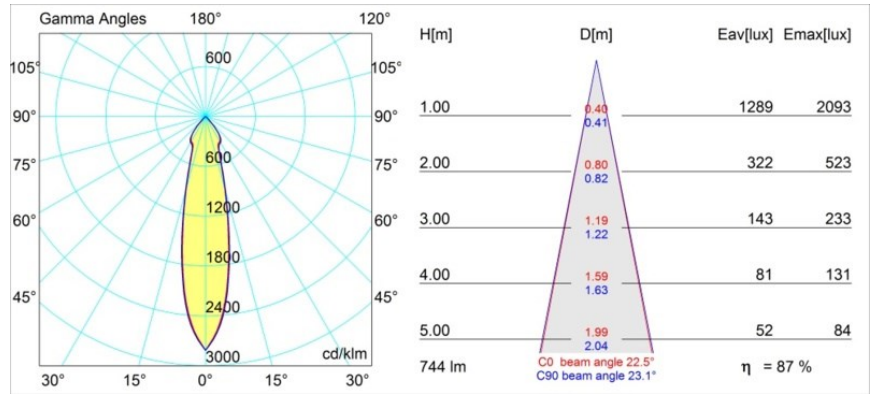


Diagrams

**Decorative Accessories**

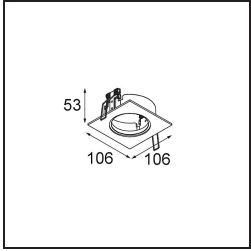

**14052009** K-Set 77 1x White Structure  
**14052032** K-Set 77 1x Black Structure

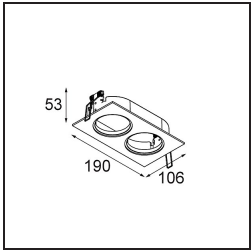


**14052109** K-Set 77 2x White Structure  
**14052132** K-Set 77 2x Black Structure

**Installation Accessories**



**10889830** Installation Housing 192x190x130



**12290130** Plaster Kit 190X190 - 70 1x

Choose a required accessory