


Date
Customer
Project
Type


*M-LED Module 50 1x LED 3000K Spot DE Aluminium Brushed Anodised*




**Specifications**

Material	14060305
Light Source Type	LED
LED Type	BRIDGELUX V8G6
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	94 99 99 100 89
Binning (SDCM)	3
Optic	Reflector
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Aluminium, Brushed Anodised
Gross weight (g)	137.0
Drive current (mA)	350      500
Min. forward voltage (Vf)	16.5      17.1
Max. forward voltage (Vf)	19.2      19.8
Connected load (W)	6.2      9.2
Luminous flux per lamp (lm)	515      691
Efficacy (lm/W)	103      96
Glare rating	21      22
Remark	• Required

**TM30 & CRI diagram**

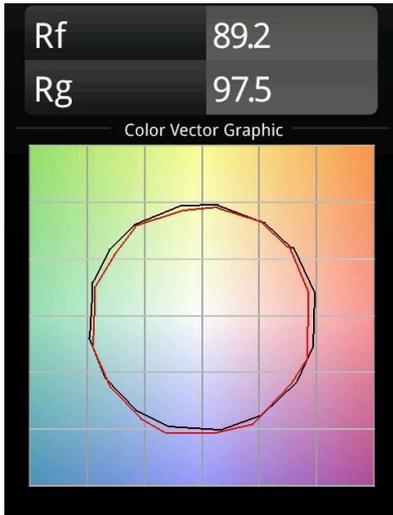

**Light distribution & beam diagram**

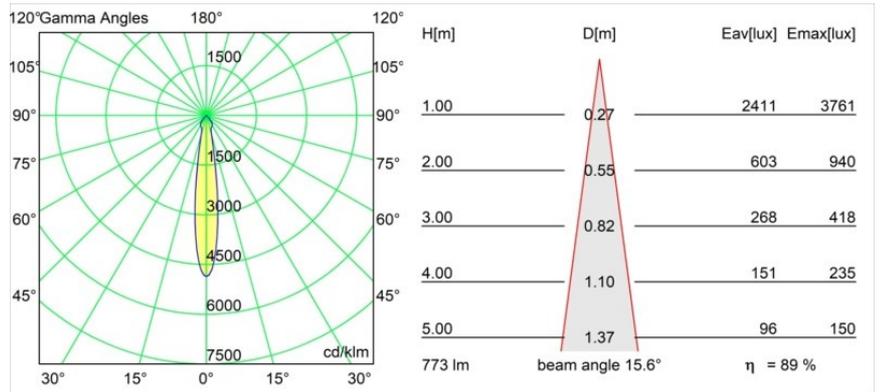

Diagrams