

Date
Customer
Project
Type

*M-LED Module 50 1x LED 1800-3000K WD Flood DE Aluminium Brushed Anodised*




**Specifications**

Material	14061405
Light Source Type	LED
LED Type	BRIDGELUX WARMDIM 6W
LED technology	LED COB
CRI	Min. 95
Colour Temperature	1800-3000K (Warm Dim)
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
Binning (SDCM)	3
Optic	Reflector
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Aluminium, Brushed Anodised
Gross weight (g)	137.0
Drive current (mA)	350
Min. forward voltage (Vf)	15,5
Max. forward voltage (Vf)	18,5
Connected load (W)	6,0
Luminous flux per lamp (lm)	460
Efficacy (lm/W)	76
Glare rating	20
Remark	• Required

**TM30 & CRI diagram**



**Light distribution & beam diagram**

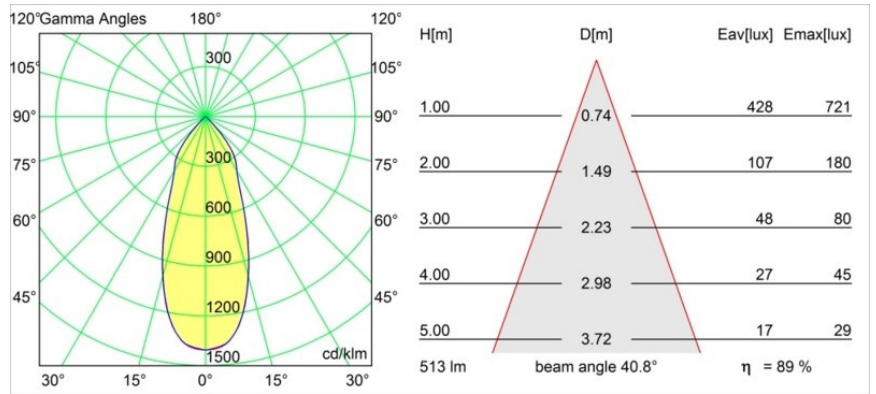

Diagrams