


Date
Customer
Project
Type


*Qbini Adjustable 1x LED 3000K Medium DE White Structure*



**Specifications**

Material	14160409
Light Source Type	LED
LED Type	CREE 1304
LED technology	LED COB
CRI	Min. 90
Colour Temperature	3000K
Lifetime	L90B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
Binning (SDCM)	2
Light Direction	Down
Optic	Reflector
Measured beam angle (°)	22.5
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	20
Glow wire rating (°C)	650
Indoor/Outdoor	Indoor
Application	Ceiling, Wall
Adjustability	H 350° V -30°/+30°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White, Structure
Gross weight (g)	175.0
Drive current (mA)	350      500
Min. forward voltage (Vf)	7,5      7,8
Max. forward voltage (Vf)	9,5      9,8
Connected load (W)	3,0      4,4
Luminous flux per lamp (lm)	325      433
Efficacy (lm/W)	108      101
Glare rating	14      15
Remark	<ul style="list-style-type: none"> <li>• Qbini Frame and Qbini Box not included</li> <li>• This is not a complete product. Qbini Frame or Qbini Box system required.</li> </ul>

**TM30 & CRI diagram**

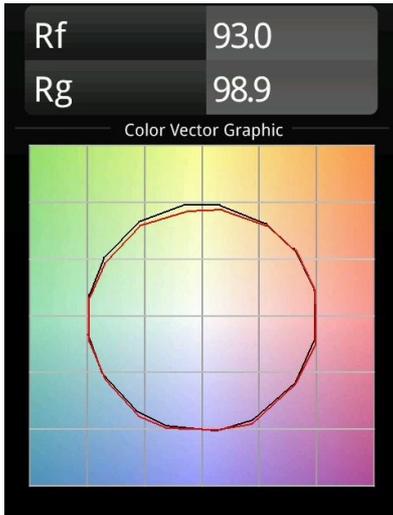

**Light distribution & beam diagram**

