



Date
Customer
Project
Type

Wink Recessed 82 1x IP54 LED 2700K Medium DE Black Structure

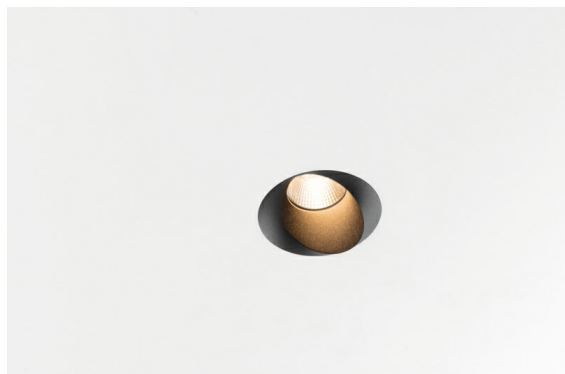

Wink may be recessed and subtle, but its technical ingenuity is nothing short of remarkable. And so is its sense of humour. As its name suggests, it likes to wink at you. The streamlined design, where elegance meets high-quality finish, results in a fixture that is half hidden in the ceiling and half peeking out. Wink 82 also fits with Wink flange, a low ring around the spot.

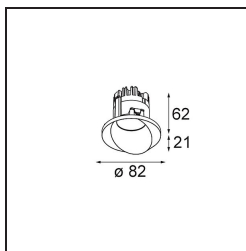

Specifications


Material	14200132
Light Source Type	LED
LED Type	BRIDGELUX V8G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L90B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	98 100 100 100 76
Binning (SDCM)	2
Light Direction	Down
Optic	Reflector
Measured beam angle (°)	23.1
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	54
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Recessed
Cut-out size (mm)	ø98
Mounting depth (mm)	100.0
Adjustability	H 355°
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black, Structure
Gross weight (g)	255.0
Drive current (mA)	350 500
Min. forward voltage (Vf)	13,2 13,7
Max. forward voltage (Vf)	15,0 15,4
Connected load (W)	5,0 7,2
Delivered lumens (lm)	419 563
Efficacy (lm/W)	84 78
Glare rating	17 18
Remark	<ul style="list-style-type: none"> This is not a complete product. Recessed Ring or Wink Flange required.




MODULAR
LIGHTING —
INSTRUMENTS

Wink Recessed 82 1x IP54 LED 2700K Medium DE Black
Structure

TM30 & CRI diagram

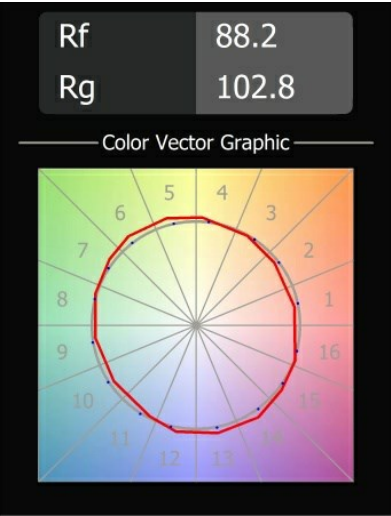


Light distribution & beam diagram

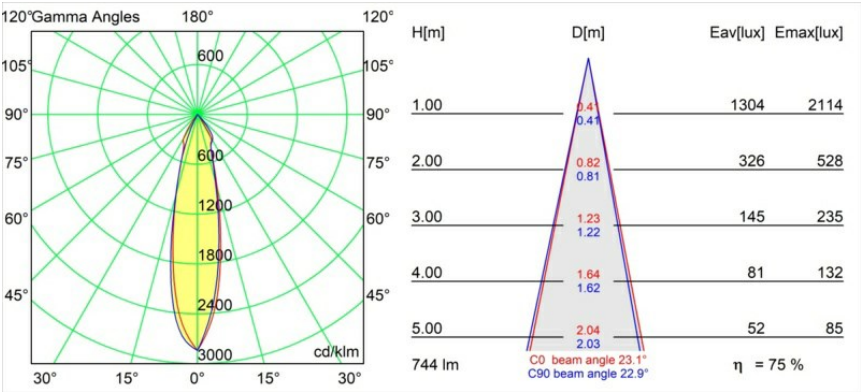


Diagrams

Installation Accessories

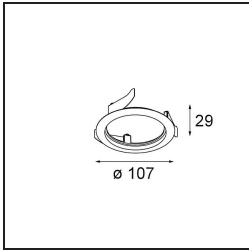

- **14203009** Ring Recessed 82 Wink White Structure
- **14203032** Ring Recessed 82 Wink 1x Black Structure

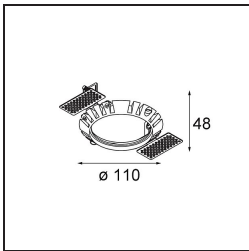

- **14203030** Ring Recessed Trimless 110 1x

■ Choose a required accessory