


Date
Customer
Project
Туре

Wink Recessed 82 1x IP54 LED 3000K Spot DE Black Structure



Wink may be recessed and subtle, but its technical ingenuity is nothing short of remarkable. And so is its sense of humour. As its name suggests, it likes to wink at you. The streamlined design, where elegance meets high-quality finish, results in a fixture that is half hidden in the ceiling and half peeking out. Wink 82 also fits with Wink flange, a low ring around the spot.





Specifications			
Material	14200332		
Light Source Type	LED		
LED Type	BRIDGELUX V8G8		
LED technology	LED COB		
CRI	Min. 90		
Colour Temperature	3000K		
Lifetime	L90B10 @50,000 Hours		
Lamp Included	Yes		
Number of Light Sources	1		
CIE flux code	98 100 100 100 75		
Binning (SDCM)	2		
Light Direction	Down		
Optic	Reflector		
Measured beam angle (°)	15.8		
Input Voltage	Constant C	Current Driver Required	
Electrical Class	III		
IP Rating	54		
Glow wire rating (°C)	960		
Indoor/Outdoor	Indoor		
Application	Ceiling		
Mounting	Recessed		
Cut-out size (mm)	ø98		
Mounting depth (mm)	100.0		
Adjustability	H 355°		
Distance to Lighted Object (m)	0,1		
Primary Colour & Primary Finish	Black, Stru	ucture	
Gross weight (g)	255.0		
Drive current (mA)	350	500	
Min. forward voltage (Vf)	13,2	13,7	
Max. forward voltage (Vf)	15,0	15,4	
Connected load (W)	5,0	7,2	
Luminous flux per lamp (lm)	434	582	
Efficacy (Im/W)	87	81	
Glare rating	18	19	

• This is not a complete product. Recessed Ring

Remark






or Wink Flange required.




TM30 & CRI diagram






Light distribution & beam diagram

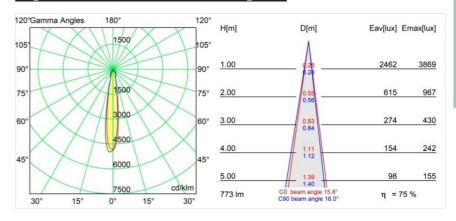



Installation Accessories



14203009 Ring Recessed 82 Wink White Structure14203032 Ring Recessed 82 Wink 1x Black Structure



14203030 Ring Recessed Trimless 110 1x

Choose a required accessory