




Date _____
Customer _____
Project _____
Type _____

Wink Asy Recessed 82 1x IP54 LED 3000K Medium DE Black Structure



Wink may be recessed and subtle, but its technical ingenuity is nothing short of remarkable. And so is its sense of humour. As its name suggests, it likes to wink at you. The streamlined design, where elegance meets high-quality finish, results in a fixture that is half hidden in the ceiling and half peeking out. Wink 82 also fits with Wink flange, a low ring around the spot.



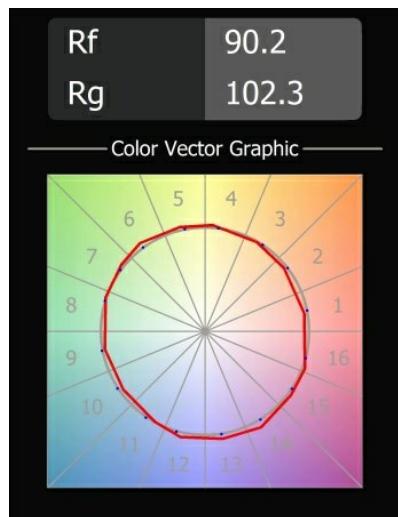
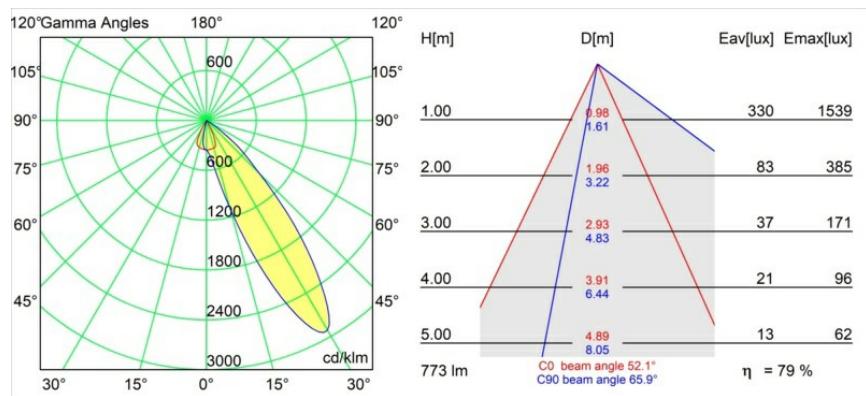
Specifications

Material	14201432	
Light Source Type	LED	
LED Type	BRIDGELUX V8G8	
LED technology	LED COB	
CRI	Min. 90	
Colour Temperature	3000K	
Lifetime	L90B10 @50,000 Hours	
Lamp Included	Yes	
Number of Light Sources	1	
CIE flux code	80 99 100 100 80	
Binning (SDCM)	2	
Light Direction	Down	
Optic	Reflector	
Input Voltage	Constant Current Driver Required	
Electrical Class	III	
IP Rating	54	
Glow wire rating (°C)	960	
Indoor/Outdoor	Indoor	
Application	Ceiling	
Mounting	Recessed	
Cut-out size (mm)	Ø98	
Mounting depth (mm)	100.0	
Adjustability	H 355°	
Distance to Lighted Object (m)	0,1	
Primary Colour & Primary Finish	Black, Structure	
Gross weight (g)	288.0	
Drive current (mA)	350	500
Min. forward voltage (Vf)	13,2	13,7
Max. forward voltage (Vf)	15,0	15,4
Connected load (W)	5,0	7,2
Luminous flux per lamp (lm)	458	615
Efficacy (lm/W)	92	85
Glare rating	20	22
Remark	• This is not a complete product. Recessed Ring or Wink Flange required.	




MODULAR
LIGHTING —
INSTRUMENTS


*Wink Asy Recessed 82 Ix IP54 LED 3000K Medium DE Black
Structure*

TM30 & CRI diagram

Light distribution & beam diagram


Installation Accessories



■ 14203009 Ring Recessed 82 Wink White Structure
■ 14203032 Ring Recessed 82 Wink 1x Black Structure



■ 14203030 Ring Recessed Trimless 110 1x

■ Choose a required accessory